



配光特性

図番 YL220026



カタログ番号	J575AN
使用ランプ	
器具光束	3954.0 lm <small>1.000</small>
器具効率	
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.67 H
C断面	
B断面	

	角度	光度
	0°	6690
	10°	5697
	20°	3627
	30°	1798
	40°	398
	50°	42
	60°	37
	70°	32
	80°	29
	90°	27
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

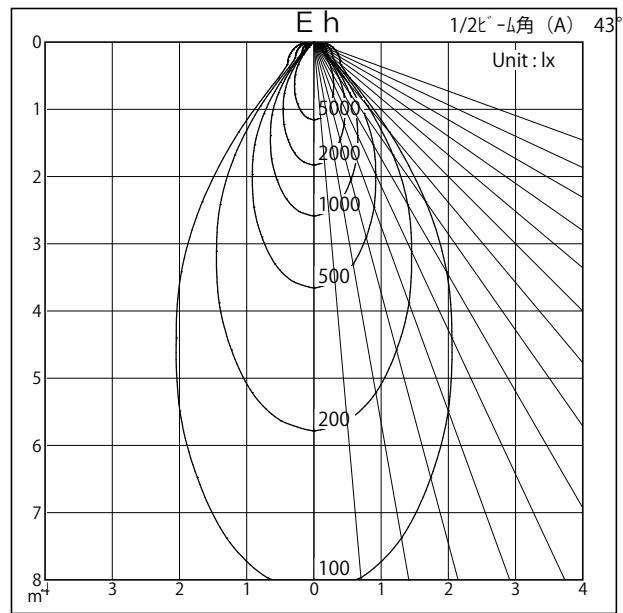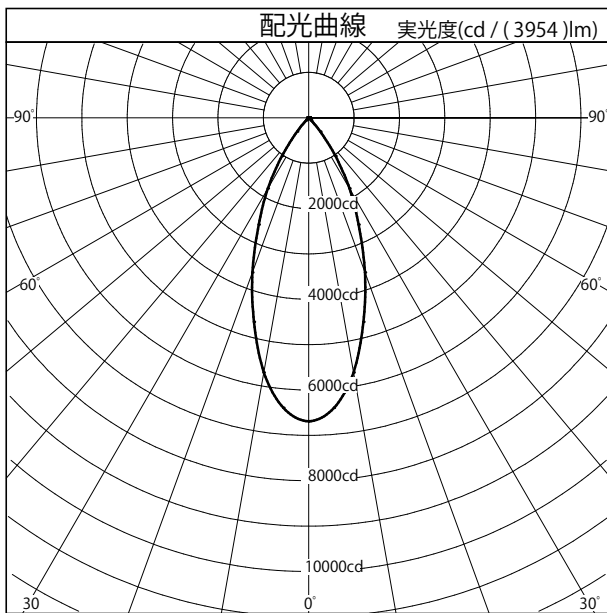

照明率表		平均照度=台数×照明率×保守率×3954(光束)/(間口×奥行)													
床面反射率 (%)		20													
天井面反射率 (%)		80			60			40			20				
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10		
室	0.50	0.69	0.64	0.60	0.68	0.64	0.60	0.68	0.63	0.60	0.67	0.63	0.60	0.59	
	0.70	0.80	0.75	0.71	0.79	0.74	0.71	0.77	0.73	0.70	0.76	0.73	0.70	0.68	
	1.00	0.89	0.84	0.80	0.87	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.77	
	1.25	0.94	0.89	0.85	0.92	0.88	0.84	0.90	0.86	0.83	0.88	0.85	0.83	0.81	
	1.50	0.97	0.93	0.89	0.95	0.91	0.88	0.93	0.89	0.87	0.90	0.88	0.86	0.83	
	指	2.00	1.02	0.98	0.95	0.99	0.96	0.93	0.96	0.93	0.91	0.94	0.91	0.89	0.87
		2.50	1.05	1.01	0.98	1.01	0.99	0.96	0.98	0.96	0.94	0.96	0.94	0.92	0.89
		3.00	1.07	1.03	1.01	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.95	0.93	0.91
		4.00	1.10	1.07	1.04	1.06	1.03	1.01	1.02	1.00	0.99	0.99	0.97	0.96	0.93
	数	5.00	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.00	1.00	0.98	0.97	0.94
7.00		1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01	1.00	0.99	0.96	
10.00		1.15	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.97	