



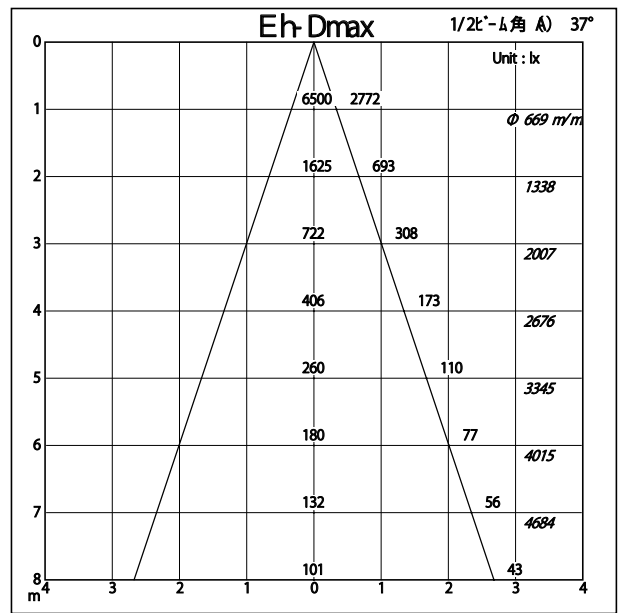

カタログ番号	J577DN
使用ランプ	
器具光束	3134.0 lm <small>1.000</small>
最大光度	5570.5 cd
1 / 2 ビーム角	
A 断面	37.00°
C 断面	
B 断面	

	角度	光度
	0°	5571
	10°	4275
	20°	2497
	30°	891
	40°	98
	50°	46
	60°	25
	70°	27
	80°	18
	90°	19
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

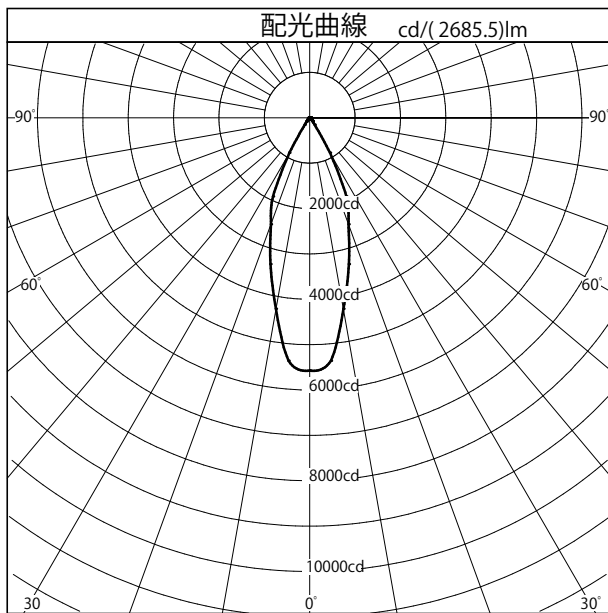

照明率表		平均照度=台数*照明率*保守率* 3134 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.69	0.65	0.62	0.68	0.64	0.61	0.68	0.64	0.61	0.67	0.64	0.61
	0.70	0.78	0.74	0.70	0.77	0.73	0.70	0.76	0.72	0.70	0.75	0.72	0.69
	1.00	0.86	0.82	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.82	0.79	0.77
	1.25	0.91	0.86	0.83	0.89	0.85	0.82	0.87	0.83	0.81	0.85	0.82	0.80
	1.50	0.94	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.87	0.85	0.83
指	2.00	0.98	0.94	0.91	0.95	0.92	0.89	0.92	0.90	0.88	0.90	0.88	0.86
	2.50	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.91	0.90	0.88
	3.00	1.02	0.99	0.96	0.99	0.96	0.94	0.95	0.93	0.92	0.92	0.91	0.90
	4.00	1.04	1.02	1.00	1.01	0.99	0.97	0.97	0.96	0.94	0.94	0.93	0.92
	5.00	1.06	1.04	1.02	1.02	1.00	0.99	0.98	0.97	0.96	0.95	0.94	0.93
数	7.00	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.99	0.98	0.96	0.95	0.94
	10.00	1.09	1.08	1.07	1.05	1.04	1.03	1.01	1.00	0.99	0.97	0.96	0.96