


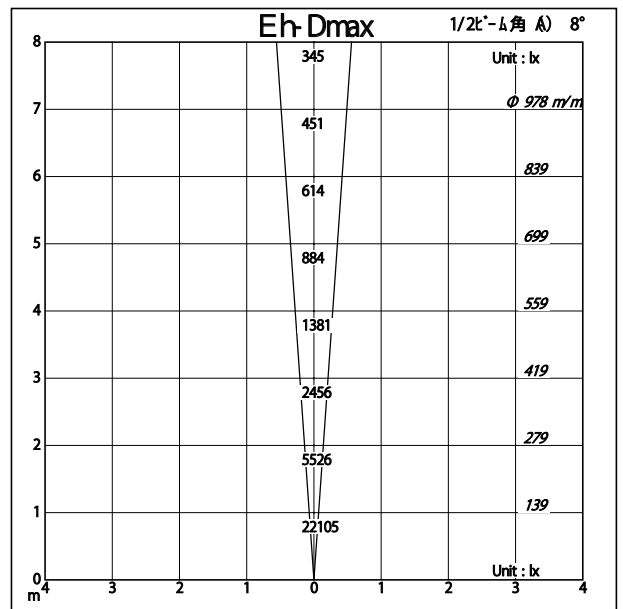
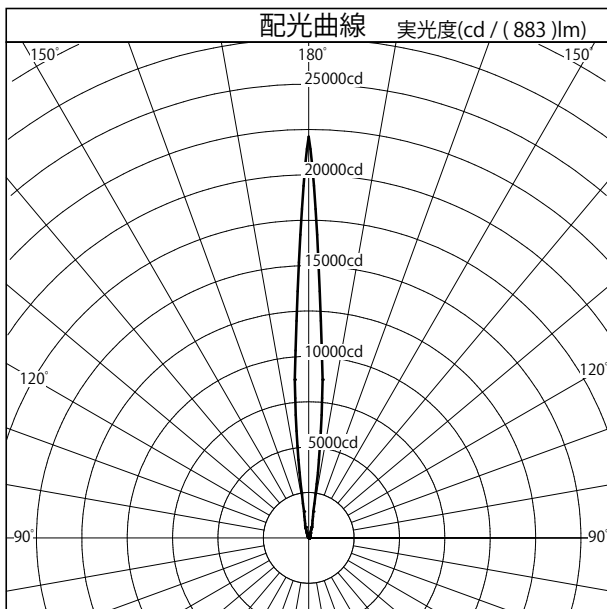
# 配光特性

図番 YL220070



カタログ番号	J4585		
使用ランプ			
器具光束	883.0	lm	1.000
最大光度	22105	cd	
1 / 2 ビーム角			
A 断面	8.00 °		
C 断面			
B 断面			

	角度	光度
	0°	0
	10°	0
	20°	0
	30°	0
	40°	0
	50°	0
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	5
	140°	25
	150°	86
	断面	160°
	170°	1474
	180°	22105



照明率表		平均照度=台数*照明率*保守率* 883 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.30	0.23	0.18	0.22	0.17	0.14	0.14	0.11	0.09	0.07	0.06	0.05	0.00
	0.70	0.40	0.33	0.27	0.29	0.24	0.20	0.19	0.16	0.13	0.09	0.08	0.07	0.00
	1.00	0.51	0.44	0.38	0.37	0.32	0.28	0.24	0.21	0.18	0.11	0.10	0.09	0.00
	1.25	0.58	0.50	0.45	0.42	0.37	0.33	0.27	0.24	0.22	0.13	0.12	0.11	0.00
	1.50	0.63	0.56	0.50	0.45	0.41	0.37	0.29	0.26	0.24	0.14	0.13	0.12	0.00
指	2.00	0.70	0.64	0.58	0.50	0.46	0.43	0.32	0.30	0.28	0.16	0.15	0.14	0.00
	2.50	0.75	0.69	0.64	0.54	0.50	0.47	0.34	0.32	0.31	0.17	0.16	0.15	0.00
	3.00	0.78	0.73	0.69	0.56	0.53	0.50	0.36	0.34	0.33	0.17	0.17	0.16	0.00
	4.00	0.83	0.79	0.75	0.60	0.57	0.54	0.38	0.37	0.35	0.18	0.18	0.17	0.00
	5.00	0.86	0.82	0.79	0.62	0.59	0.57	0.39	0.38	0.37	0.19	0.18	0.18	0.00
数	7.00	0.89	0.87	0.84	0.64	0.62	0.61	0.41	0.40	0.39	0.20	0.19	0.19	0.00
	10.00	0.92	0.90	0.88	0.66	0.65	0.63	0.42	0.41	0.41	0.20	0.20	0.20	0.00