



配光特性

図番 YL220076



カタログ番号	J4584
使用ランプ	LED 7.8w
器具光束	793.0 lm <small>1,000</small>
器具効率	
下方効率	0.0 %
上方効率	100.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	0
10°	0
20°	0
30°	0
40°	0
50°	0
60°	0
70°	0
80°	0
90°	0
100°	29
110°	113
120°	341
130°	622
140°	872
150°	936
160°	632
170°	354
180°	224

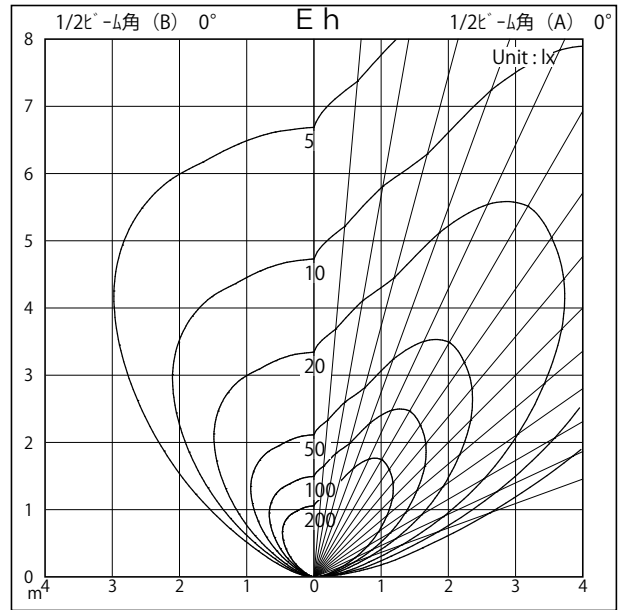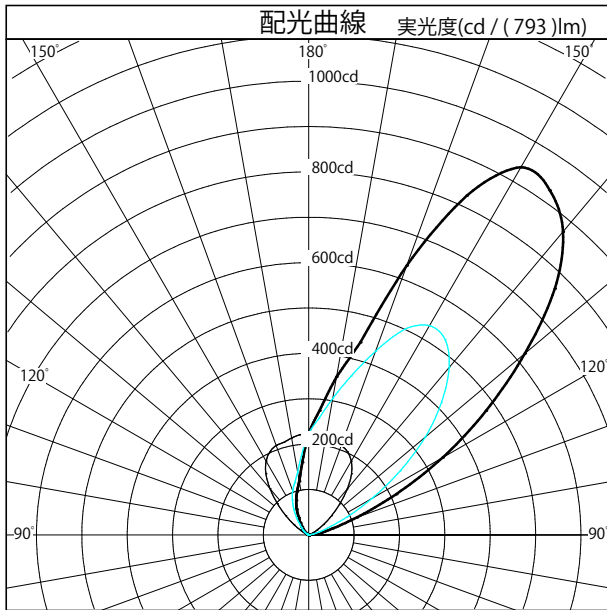

壁面からの距離 (m)	壁面照度分布 (lx)							単灯		連灯	
	0.50	1.00	1.50	2.00	2.50	3.00	3.50	3.50	3.00	2.50	2.00
3.50	10	10	9	7	5	3	2	44	44	44	
3.00	18	17	14	10	6	4	2	65	65	65	
2.50	36	31	22	14	8	4	2	101	100	101	
2.00	77	60	36	18	8	3	1	168	165	168	
1.50	159	111	50	19	6	2	1	272	265	272	
1.00	271	158	48	11	2	1	0	373	339	373	
0.50	181	79	13	2	0	0	0	207	162	207	

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0 (m)
単位: lx (m)