


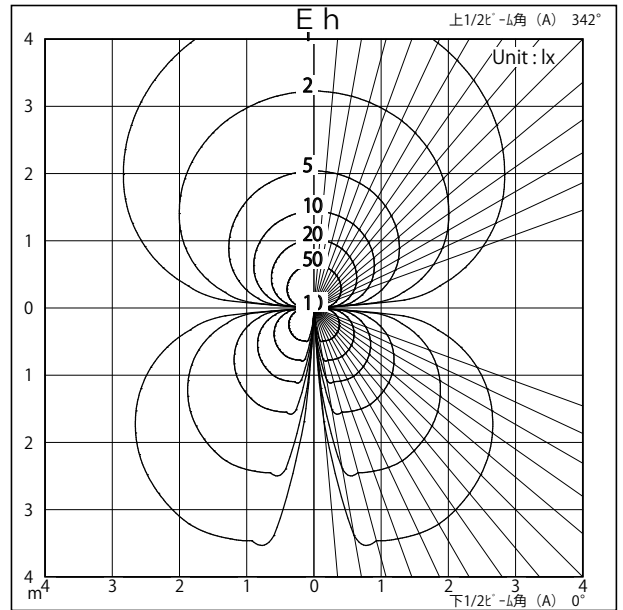
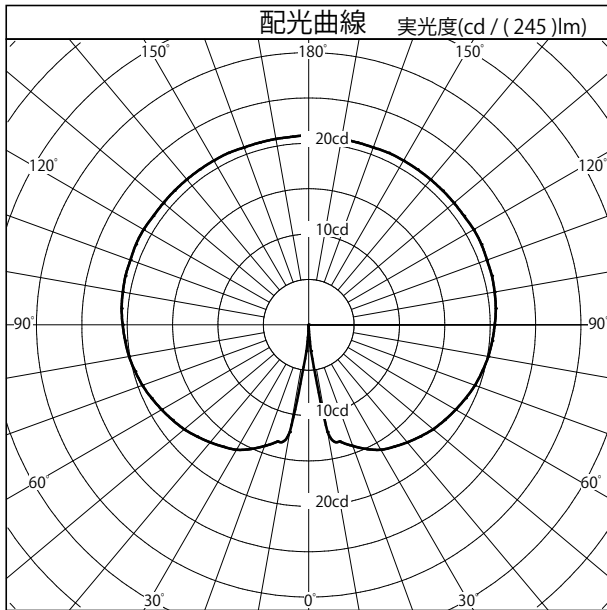
配光特性

図番 YL220072



カタログ番号	H4288B	
使用ランプ		
器具光束	245.0	lm _{1,000}
器具効率	99.9 %	
下方効率	46.4 %	
上方効率	53.5 %	
最大取付間隔	下方向	上方向
A断面	0.00 H	1.53 H
C断面		
B断面		

	角度	光度
	0°	0
	10°	12
	20°	14
	30°	16
	40°	17
	50°	18
	60°	19
	70°	20
	80°	20
	90°	21
	100°	21
	110°	21
	120°	21
	130°	21
	140°	21
	150°	21
160°	21	
170°	21	
180°	21	



照明率表		平均照度=台数×照明率×保守率×245(光束)/(間口×奥行)													
床面反射率 (%)		20												0	
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.28	0.20	0.15	0.23	0.17	0.12	0.19	0.13	0.10	0.14	0.10	0.07	0.04	
	0.70	0.37	0.28	0.22	0.31	0.24	0.18	0.25	0.19	0.15	0.19	0.15	0.11	0.07	
	1.00	0.48	0.39	0.32	0.40	0.32	0.27	0.32	0.26	0.22	0.24	0.20	0.17	0.11	
	1.25	0.55	0.46	0.38	0.45	0.38	0.32	0.36	0.31	0.26	0.28	0.24	0.20	0.13	
	1.50	0.60	0.51	0.44	0.49	0.42	0.37	0.40	0.34	0.30	0.31	0.27	0.23	0.16	
	指	2.00	0.68	0.59	0.52	0.56	0.49	0.44	0.45	0.40	0.36	0.35	0.31	0.28	0.19
		2.50	0.73	0.65	0.59	0.60	0.54	0.49	0.49	0.44	0.40	0.38	0.34	0.31	0.22
		3.00	0.77	0.70	0.64	0.64	0.58	0.53	0.51	0.47	0.43	0.40	0.37	0.34	0.24
		4.00	0.83	0.76	0.71	0.68	0.64	0.59	0.55	0.52	0.48	0.43	0.41	0.38	0.28
		5.00	0.86	0.81	0.76	0.72	0.67	0.63	0.58	0.55	0.52	0.46	0.43	0.41	0.30
数	7.00	0.91	0.86	0.82	0.76	0.72	0.69	0.61	0.59	0.56	0.48	0.47	0.45	0.33	
	10.00	0.95	0.91	0.88	0.79	0.76	0.74	0.64	0.62	0.60	0.51	0.49	0.48	0.36	