




配光特性

図番 YL240065



カタログ番号	H4724B
使用ランプ	LED35.2W(40W)
器具光束	3767.0 lm <small>1.000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	3
10°	2903
20°	2914
30°	2402
40°	1754
50°	1132
60°	619
70°	257
80°	69
90°	3
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	1
170°	2
180°	0

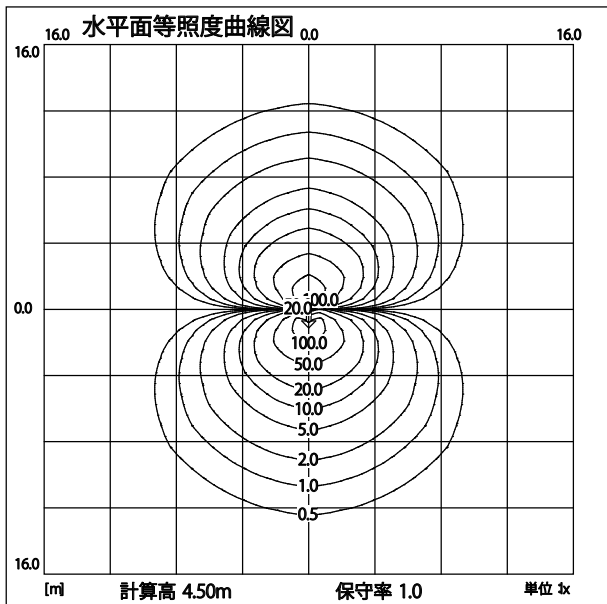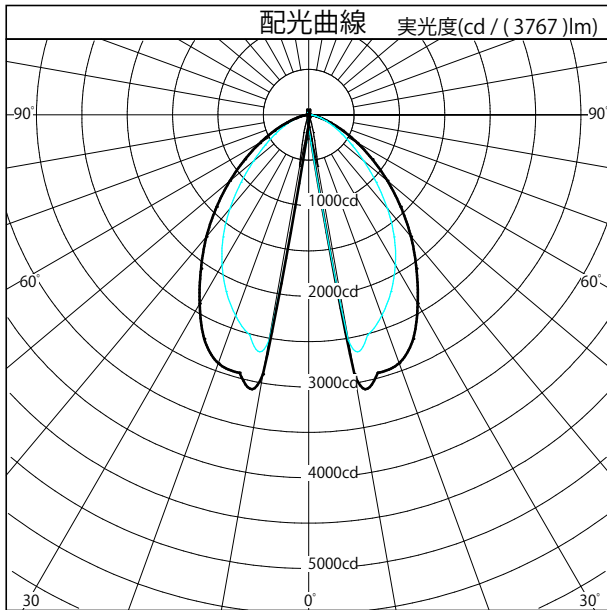



配光特性

図番 YL240066



カタログ番号	H4724B	
使用ランプ	LED35.2W(40W)	
器具光束	3786.0	lm _{1.000}
下方効率	99.4 %	
上方効率	0.6 %	
最大取付間隔		
A断面		
C断面		
B断面		

角度	光度
0°	3
10°	2981
20°	3027
30°	2836
40°	2225
50°	1616
60°	1077
70°	565
80°	183
90°	5
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	1
170°	2
180°	0

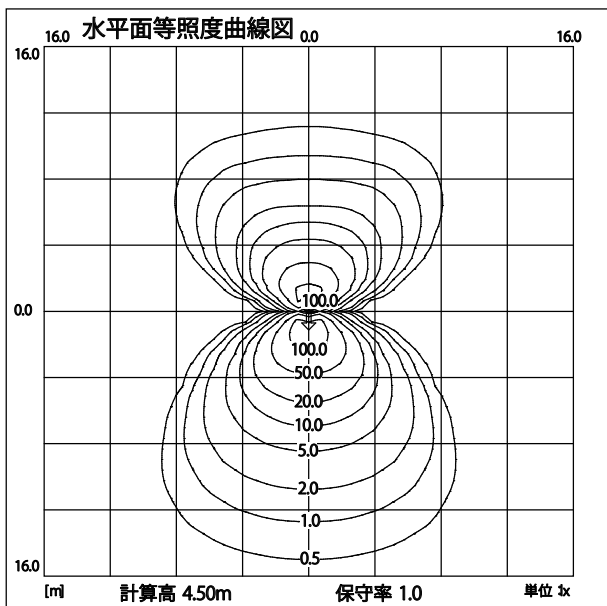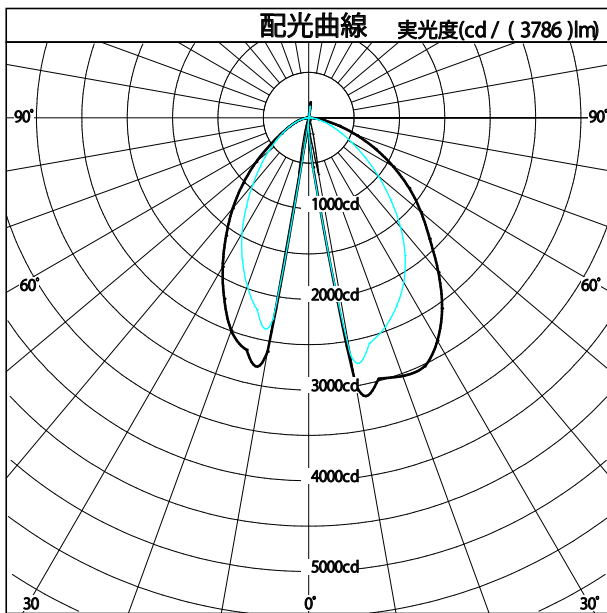

配光特性

図番 YL240067



カタログ番号	H4724B
使用ランプ	LED35.2W(40W)
器具光束	3688.0 lm <small>1.000</small>
下方効率	99.4 %
上方効率	0.5 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	2
10°	2735
20°	2922
30°	2914
40°	2647
50°	2085
60°	1419
70°	827
80°	300
90°	9
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	1
180°	0

