

Luminaire

Code AF15001+AF95204
 Name SHARP RECESSED TRIM 8X 24W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK

Measurem.


Code FTS1603155
 Name SHARP RECESSED TRIM 8X 24W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK

Luminaire Flux	1582.00 lm	Luminaire Power	22.00 W	Efficacy	71.91 lm/W	Efficiency	100.00%
Lamps Flux	1582.00 lm	Maximum value	5604.42 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	298 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1582.00 lm	

LED Flux=2122,64lm LED Power=22W Eff=75% EfcLed=96lm/W EfcLum=72lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	100 100 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1


298mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

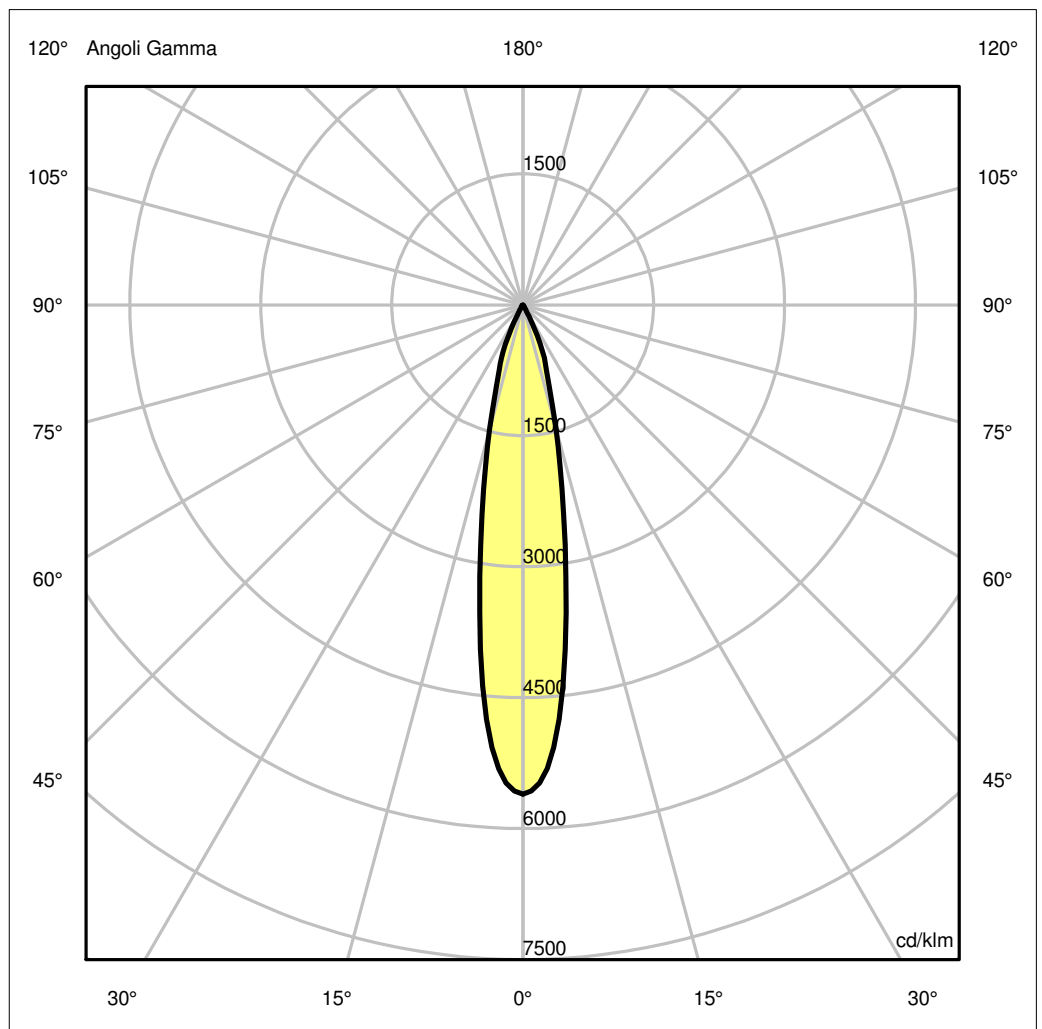

Luminaire

Code AF15001+AF95204
Name SHARP RECESSED TRIM 8X 24W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK

Measurerm.

Code FTS1603155
Name SHARP RECESSED TRIM 8X 24W 930 FLOOD WHITE EXT.DRV + SCREEN 4X BLACK


Luminaire Flux	1582.00 lm	Luminaire Power	22.00 W	Efficacy	71.91 lm/W	Efficiency	100.00%
Lamps Flux	1582.00 lm	Maximum value	5604.42 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	298 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1582.00 lm	
LED Flux=2122,64lm LED Power=22W Eff=75% EfcLed=96lm/W EfcLum=72lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	8866.20	7539.25	2314.78	619.20	36.66	7.75	0.98	0.00	0.00	0.00
OB	8866.20	7539.25	2314.78	619.20	36.66	7.75	0.98	0.00	0.00	0.00
OC	8866.20	7539.25	2314.78	619.20	36.66	7.75	0.98	0.00	0.00	0.00
OD	8866.20	7539.25	2314.78	619.20	36.66	7.75	0.98	0.00	0.00	0.00

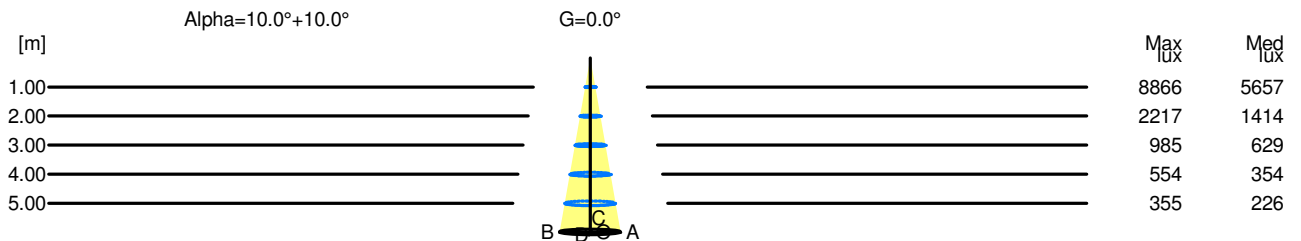

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	8866	5657		
2.00	0.70	2217	1414		
3.00	1.05	985	629		
4.00	1.40	554	354		
5.00	1.75	355	226		