



# 配光特性

図番 YL230002



カタログ番号	J593BN
使用ランプ	
器具光束	634.0 lm <sub>1.000</sub>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.54 H
C断面	
B断面	

<p>3000K</p>  <p>断面</p>	角度	光度
	0°	1815
	10°	1361
	20°	602
	30°	120
	40°	22
	50°	16
	60°	7
	70°	5
	80°	4
	90°	5
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

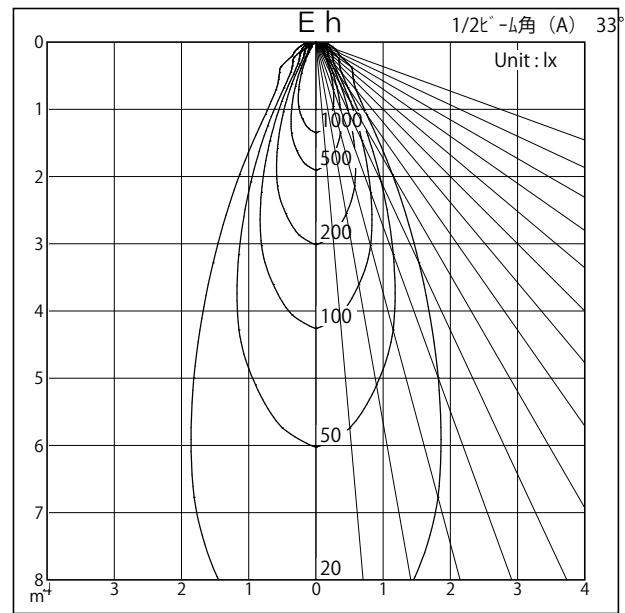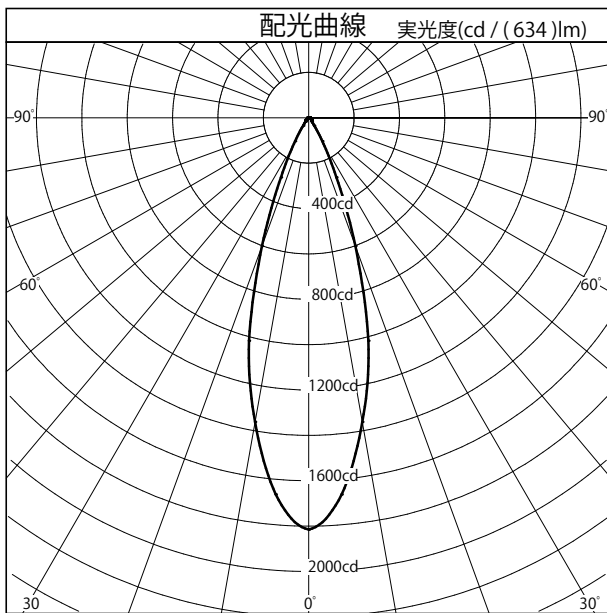

照明率表		平均照度=台数*照明率*保守率*634(光束)/(間口*奥行)													
床面反射率 (%)		20												0	
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.78	0.74	0.71	0.77	0.73	0.71	0.77	0.73	0.71	0.76	0.73	0.70	0.69	
	0.70	0.87	0.82	0.79	0.85	0.81	0.78	0.84	0.81	0.78	0.83	0.80	0.78	0.76	
	1.00	0.94	0.90	0.86	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.83	
	1.25	0.98	0.94	0.91	0.96	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86	
	1.50	1.01	0.97	0.94	0.99	0.95	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.88	
	指	2.00	1.05	1.01	0.98	1.02	0.99	0.96	0.99	0.97	0.95	0.97	0.95	0.93	0.91
		2.50	1.07	1.04	1.01	1.04	1.01	0.99	1.01	0.99	0.97	0.98	0.96	0.95	0.92
		3.00	1.09	1.06	1.04	1.06	1.03	1.01	1.02	1.00	0.99	0.99	0.98	0.96	0.94
		4.00	1.12	1.09	1.07	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
	数	5.00	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	0.99	0.96
7.00		1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97	
10.00		1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.06	1.06	1.03	1.02	1.02	0.98	