



# 配光特性

図番 YL230004



カタログ番号	J593DN
使用ランプ	
器具光束	673.0 lm <sub>1.000</sub>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.54 H
C断面	
B断面	

	4000K	角度	光度
		0°	1927
		10°	1445
		20°	639
		30°	127
		40°	24
		50°	17
		60°	7
		70°	6
		80°	4
		90°	6
		100°	0
		110°	0
		120°	0
		130°	0
		140°	0
		150°	0
		160°	0
	170°	0	
	180°	0	

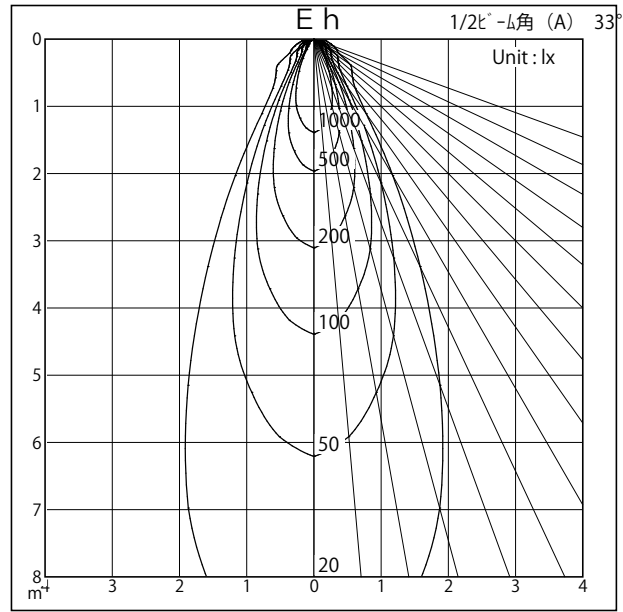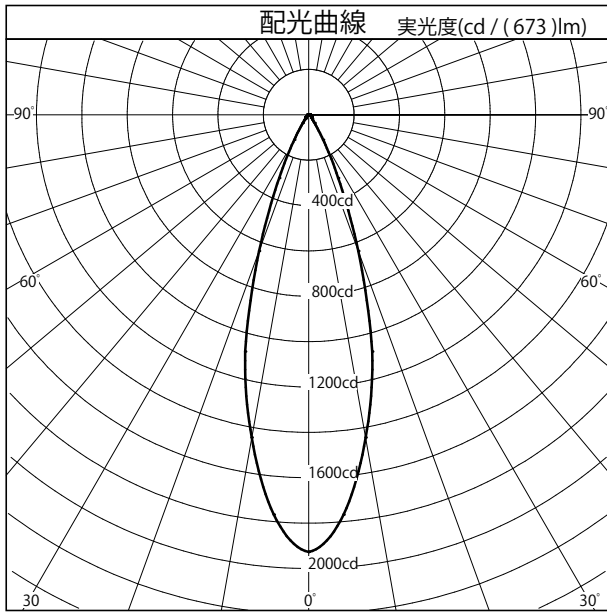

照明率表		平均照度=台数*照明率*保守率*673(光束)/(間口*奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.78	0.74	0.71	0.77	0.73	0.71	0.77	0.73	0.71	0.76	0.73	0.70	0.69
	0.70	0.87	0.82	0.79	0.85	0.81	0.78	0.84	0.81	0.78	0.83	0.80	0.78	0.76
	1.00	0.94	0.90	0.86	0.92	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.83
	1.25	0.98	0.94	0.91	0.96	0.92	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86
	1.50	1.01	0.97	0.94	0.99	0.95	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.88
指	2.00	1.05	1.01	0.98	1.02	0.99	0.96	0.99	0.97	0.95	0.97	0.95	0.93	0.91
	2.50	1.07	1.04	1.01	1.04	1.01	0.99	1.01	0.99	0.97	0.98	0.96	0.95	0.92
	3.00	1.09	1.06	1.04	1.06	1.03	1.01	1.02	1.00	0.99	0.99	0.98	0.96	0.94
	4.00	1.12	1.09	1.07	1.08	1.06	1.04	1.04	1.02	1.01	1.01	0.99	0.98	0.95
	5.00	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.02	1.01	1.00	0.99	0.96
数	7.00	1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97
	10.00	1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.06	1.06	1.03	1.02	1.02	0.98