



配光特性

図番 YL230007



カタログ番号	J594CN
使用ランプ	
器具光束	1156.0 lm <small>1.000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.69 H
C断面	
B断面	

<p>3500K</p>  <p>断面</p>	角度	光度
	0°	2279
	10°	2068
	20°	1252
	30°	280
	40°	53
	50°	24
	60°	11
	70°	12
	80°	10
	90°	7
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

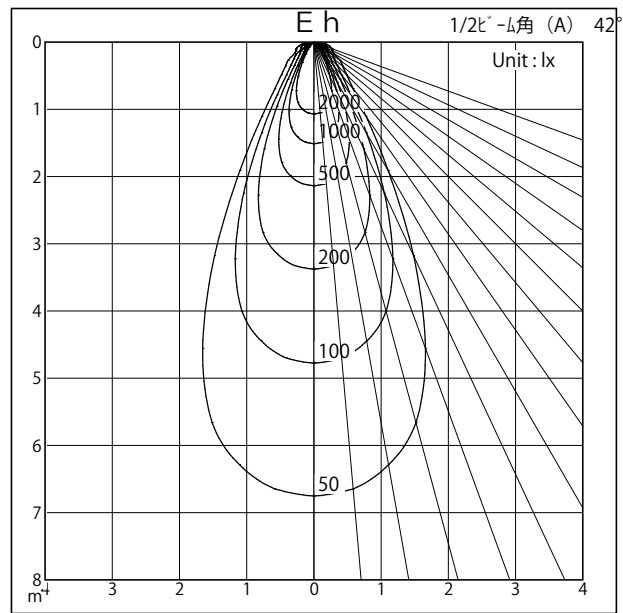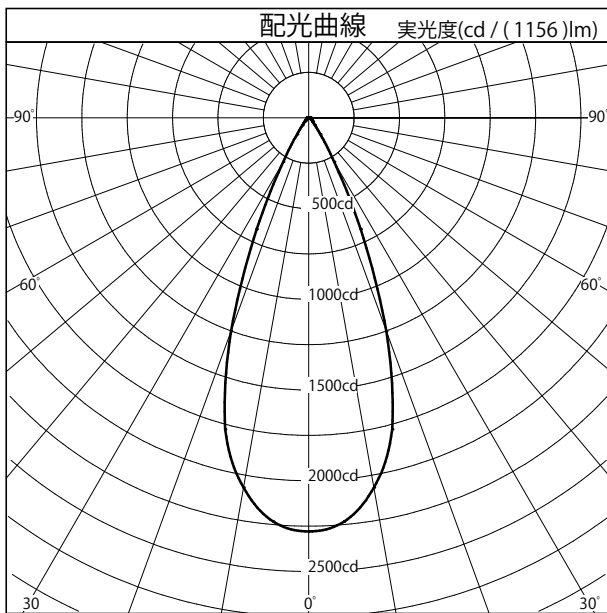

照明率表		平均照度=台数×照明率×保守率×1156(光束)/(間口×奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.74	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.66	0.72	0.68	0.65	0.64
	0.70	0.83	0.78	0.75	0.82	0.78	0.74	0.81	0.77	0.74	0.80	0.76	0.74	0.72
	1.00	0.91	0.87	0.83	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.83	0.81	0.80
	1.25	0.96	0.91	0.88	0.94	0.90	0.87	0.92	0.88	0.86	0.90	0.87	0.85	0.83
	1.50	0.99	0.95	0.91	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85
指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.95	0.92	0.95	0.93	0.91	0.88
	2.50	1.06	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.95	0.93	0.90
	3.00	1.07	1.04	1.02	1.04	1.01	0.99	1.01	0.99	0.97	0.97	0.96	0.94	0.92
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.97	0.94
	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
数	7.00	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96
	10.00	1.15	1.14	1.13	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97