



# 配光特性

図番 YL230072



カタログ番号	J595BW
使用ランプ	
器具光束	834.0 lm <small>1.000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	1.11 H
C断面	
B断面	

 3000K 断面	角度	光度
	0°	563
	10°	551
	20°	508
	30°	412
	40°	232
	50°	76
	60°	35
	70°	24
	80°	13
	90°	5
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

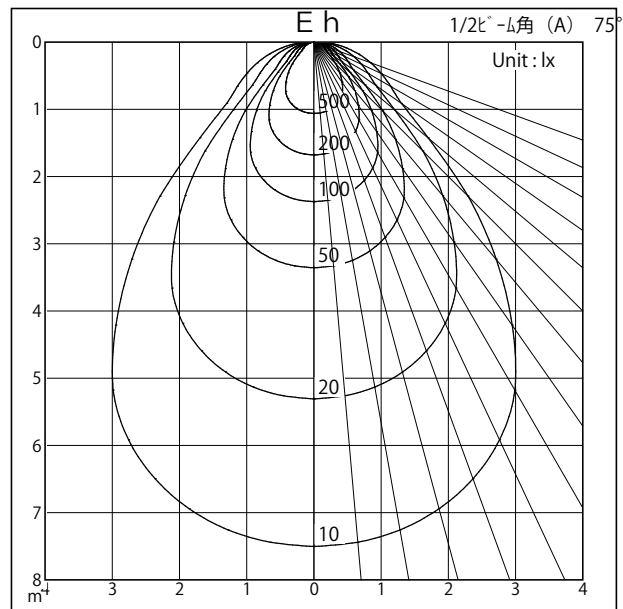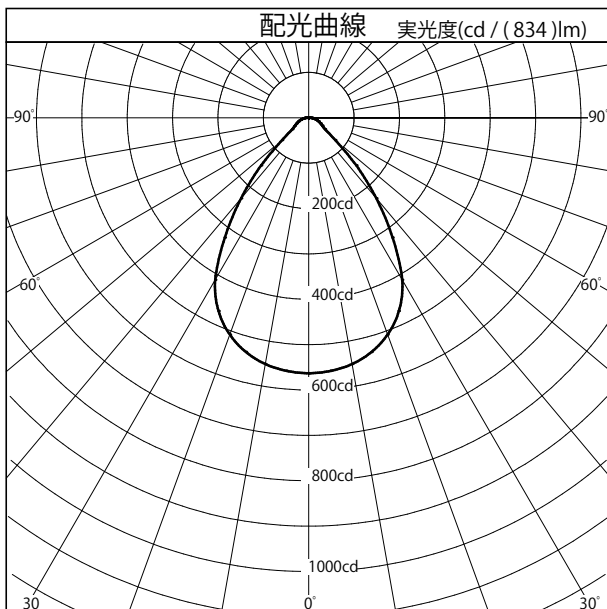

照明率表		平均照度=台数×照明率×保守率×834(光束)/(間口×奥行)													
床面反射率 (%)		20												0	
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.52	0.46	0.41	0.51	0.45	0.41	0.51	0.45	0.41	0.50	0.44	0.41	0.39	
	0.70	0.66	0.59	0.54	0.64	0.58	0.54	0.63	0.57	0.53	0.62	0.57	0.53	0.51	
	1.00	0.78	0.71	0.67	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.68	0.65	0.63	
	1.25	0.85	0.78	0.73	0.82	0.77	0.73	0.80	0.75	0.72	0.78	0.74	0.71	0.69	
	1.50	0.89	0.83	0.79	0.87	0.82	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73	
	指	2.00	0.96	0.90	0.86	0.93	0.88	0.84	0.90	0.86	0.83	0.87	0.84	0.81	0.79
		2.50	1.00	0.95	0.91	0.96	0.92	0.89	0.93	0.90	0.87	0.90	0.87	0.85	0.82
		3.00	1.02	0.98	0.94	0.99	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.87	0.85
		4.00	1.06	1.03	1.00	1.02	0.99	0.97	0.98	0.96	0.94	0.95	0.93	0.91	0.88
	数	5.00	1.09	1.06	1.03	1.04	1.02	1.00	1.00	0.98	0.97	0.97	0.95	0.94	0.90
7.00		1.11	1.09	1.07	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.97	0.96	0.93	
10.00		1.14	1.12	1.10	1.09	1.07	1.06	1.04	1.03	1.02	1.00	0.99	0.99	0.95	