



# 配光特性

図番 YL230073



カタログ番号	J595CW
使用ランプ	
器具光束	882.0 lm <small>1.000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	1.11 H
C断面	
B断面	

	3500K	角度	光度
		0°	596
		10°	583
		20°	538
		30°	437
		40°	246
		50°	81
		60°	37
		70°	25
		80°	14
		90°	6
		100°	0
		110°	0
		120°	0
		130°	0
		140°	0
		150°	0
		160°	0
	170°	0	
	180°	0	

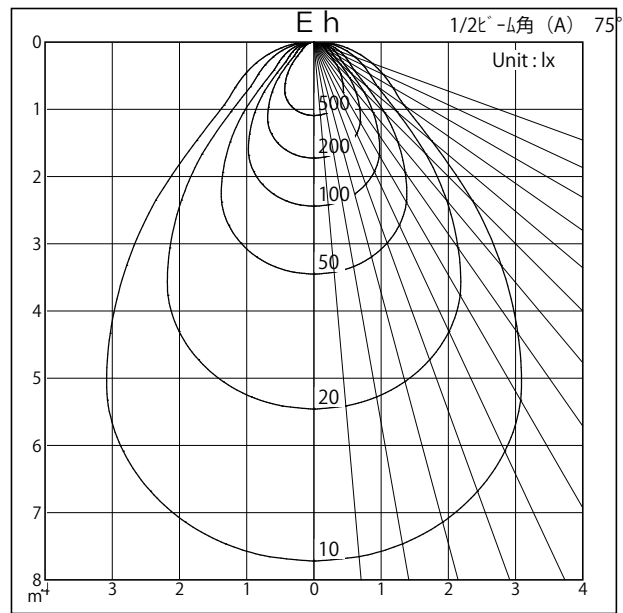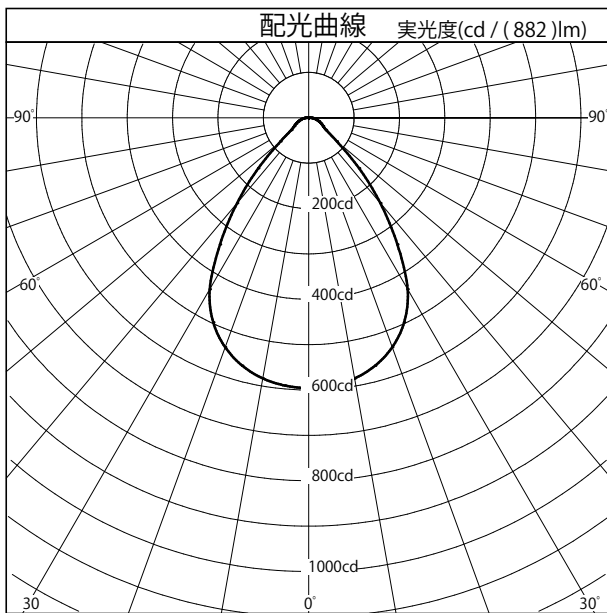

照明率表		平均照度=台数*照明率*保守率*882(光束)/(間口*奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.52	0.46	0.41	0.51	0.45	0.41	0.51	0.45	0.41	0.50	0.44	0.41	0.39
	0.70	0.66	0.59	0.54	0.64	0.58	0.54	0.63	0.57	0.53	0.62	0.57	0.53	0.51
	1.00	0.78	0.71	0.67	0.76	0.70	0.66	0.74	0.69	0.65	0.73	0.68	0.65	0.63
	1.25	0.85	0.78	0.73	0.82	0.77	0.73	0.80	0.75	0.72	0.78	0.74	0.71	0.69
	1.50	0.89	0.83	0.79	0.87	0.82	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73
指	2.00	0.96	0.90	0.86	0.93	0.88	0.84	0.90	0.86	0.83	0.87	0.84	0.81	0.79
	2.50	1.00	0.95	0.91	0.96	0.92	0.89	0.93	0.90	0.87	0.90	0.87	0.85	0.82
	3.00	1.02	0.98	0.94	0.99	0.95	0.92	0.95	0.92	0.90	0.92	0.90	0.87	0.85
	4.00	1.06	1.03	1.00	1.02	0.99	0.97	0.98	0.96	0.94	0.95	0.93	0.91	0.88
	5.00	1.09	1.06	1.03	1.04	1.02	1.00	1.00	0.98	0.97	0.97	0.95	0.94	0.90
数	7.00	1.11	1.09	1.07	1.07	1.05	1.03	1.03	1.01	1.00	0.99	0.97	0.96	0.93
	10.00	1.14	1.12	1.10	1.09	1.07	1.06	1.04	1.03	1.02	1.00	0.99	0.99	0.95