



# 配光特性

図番 YL230074



カタログ番号	J596AN
使用ランプ	
器具光束	459.0 lm <small>1.000</small>
最大光度	3165.8 cd
1 / 2 ビーム角	
A 断面	18.00°
C 断面	
B 断面	

2700K  断面	角度	光度
	0°	3166
	10°	1359
	20°	219
	30°	25
	40°	7
	50°	7
	60°	5
	70°	3
	80°	3
	90°	2
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

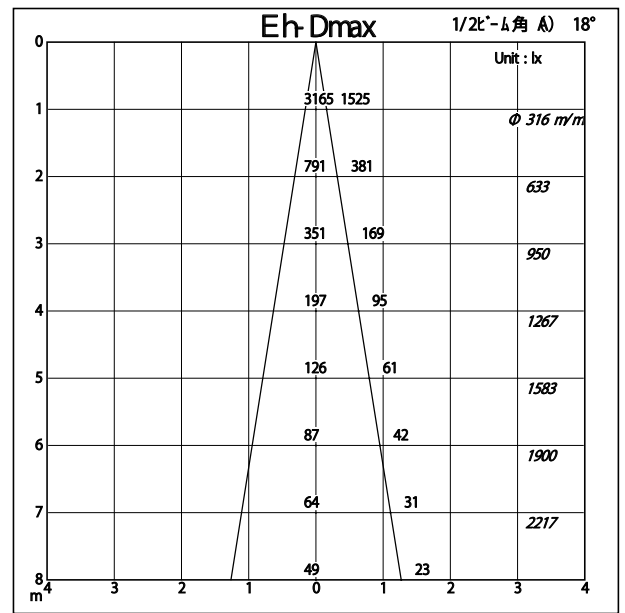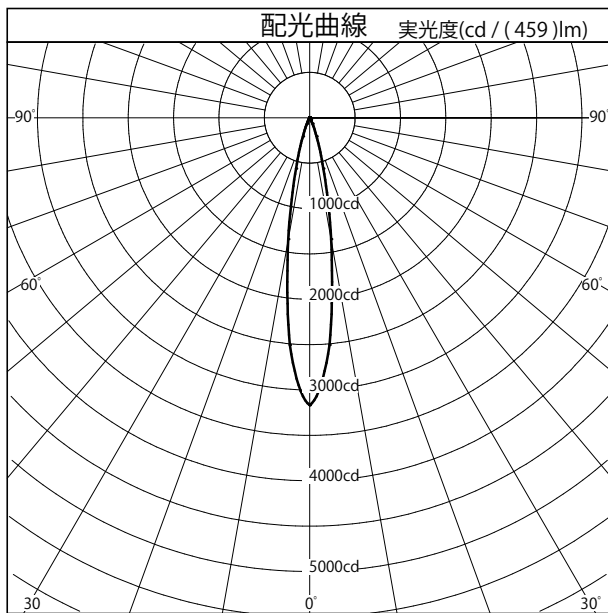

照明率表		平均照度=台数*照明率*保守率* 459 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.86	0.83	0.81	0.85	0.83	0.81	0.85	0.82	0.81	0.84	0.82	0.80
	0.70	0.91	0.88	0.85	0.90	0.87	0.85	0.89	0.86	0.84	0.88	0.86	0.84
	1.00	0.95	0.92	0.90	0.94	0.91	0.89	0.93	0.90	0.88	0.91	0.89	0.87
	1.25	0.98	0.95	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.89
	1.50	1.00	0.97	0.94	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91
指	2.00	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.96	0.94	0.95	0.94	0.92
	2.50	1.05	1.02	1.00	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94
	3.00	1.06	1.03	1.01	1.02	1.01	0.99	0.99	0.98	0.97	0.97	0.95	0.94
	4.00	1.08	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.97	0.96	0.96
	5.00	1.09	1.07	1.06	1.05	1.03	1.02	1.01	1.00	0.99	0.98	0.97	0.96
数	7.00	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.00	0.98	0.98	0.97
	10.00	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01	0.99	0.98	0.98