



# 配光特性

図番 YL230078



カタログ番号	J597CN
使用ランプ	
器具光束	353.0 lm <small>1.000</small>
最大光度	1256.9 cd
1 / 2 ビーム角	
A 断面	28.00°
C 断面	
B 断面	

<div style="text-align: center;">3500K</div> 	角度	光度
	0°	1257
	10°	873
	20°	332
	30°	39
	40°	8
	50°	5
	60°	4
	70°	3
	80°	2
	90°	2
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

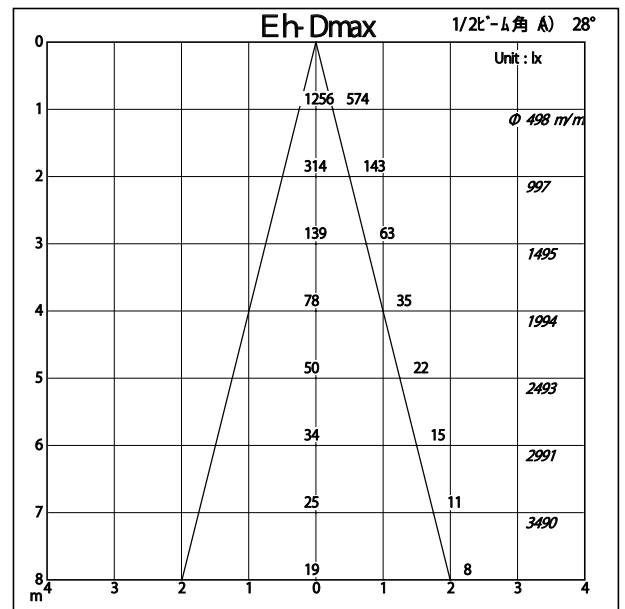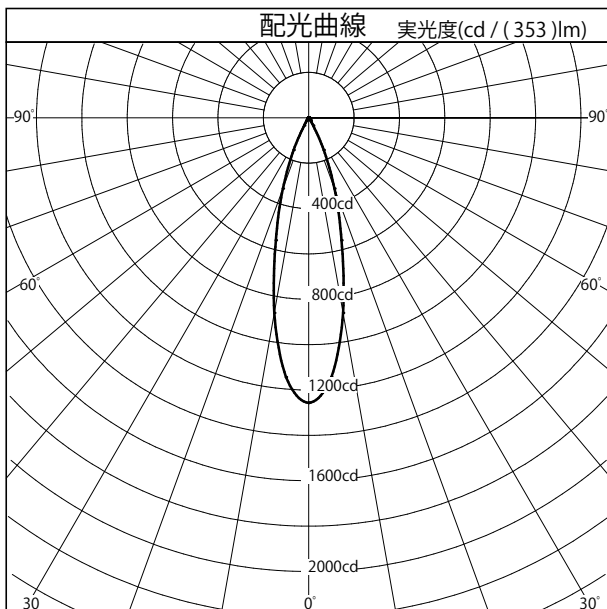

照明率表		平均照度=台数*照明率*保守率* 353 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.82	0.78	0.75	0.81	0.78	0.75	0.81	0.77	0.75	0.80	0.77	0.75	0.74
	0.70	0.90	0.85	0.82	0.88	0.85	0.82	0.87	0.84	0.82	0.86	0.83	0.81	0.80
	1.00	0.96	0.92	0.89	0.95	0.91	0.88	0.93	0.90	0.88	0.92	0.89	0.87	0.85
	1.25	1.00	0.96	0.93	0.98	0.94	0.92	0.96	0.93	0.91	0.94	0.92	0.90	0.88
	1.50	1.03	0.99	0.96	1.00	0.97	0.94	0.98	0.95	0.93	0.96	0.94	0.92	0.90
指	2.00	1.06	1.03	1.00	1.03	1.00	0.98	1.00	0.98	0.96	0.98	0.96	0.95	0.92
	2.50	1.08	1.05	1.03	1.05	1.03	1.00	1.02	1.00	0.98	0.99	0.98	0.96	0.94
	3.00	1.10	1.07	1.05	1.06	1.04	1.02	1.03	1.01	1.00	1.00	0.99	0.97	0.95
	4.00	1.12	1.10	1.08	1.08	1.06	1.05	1.05	1.03	1.02	1.01	1.00	0.99	0.96
	5.00	1.14	1.12	1.10	1.09	1.08	1.06	1.06	1.04	1.03	1.02	1.01	1.00	0.97
数	7.00	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	0.98
	10.00	1.17	1.16	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.03	1.03	1.02	0.99