



配光特性

図番 YL230021

カタログ番号	J598AN
使用ランプ	
器具光束	530.0 lm <small>1.000</small>
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	



角度	光度
0°	249
10°	306
20°	350
30°	335
40°	257
50°	156
60°	83
70°	47
80°	26
90°	10
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

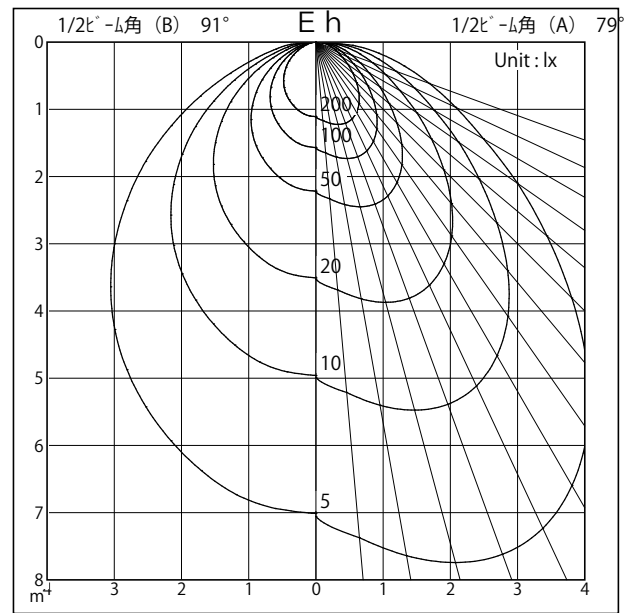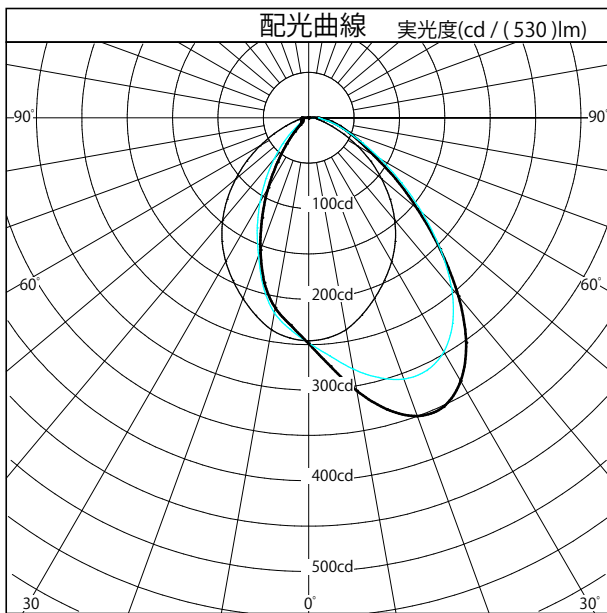

(m)	壁面照度分布						単灯
	0.50	1.00	1.50	2.00	2.50	3.00	(m)
0.50	49	33	13	5	2	1	
1.00	72	52	24	9	4	2	1
1.50	53	42	25	11	5	2	1
2.00	31	26	19	11	6	3	2
2.50	18	16	13	8	5	3	2
3.00	11	10	8	6	4	3	2
3.50	7	6	6	5	3	2	2

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0

(m)	連灯		
	0.50		
0.50	81	78	81
1.00	131	128	131
1.50	117	114	117
2.00	85	83	85
2.50	59	58	59
3.00	43	42	43
3.50	31	31	31

単位: lx (m)