



配光特性

図番 YL230023



カタログ番号	J598CN
使用ランプ	
器具光束	604.0 lm _{1.000}
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	284
10°	348
20°	399
30°	382
40°	293
50°	178
60°	94
70°	53
80°	29
90°	12
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0

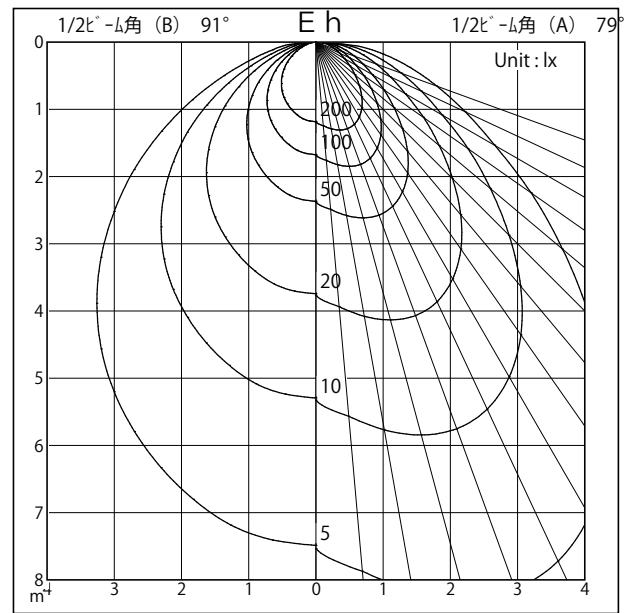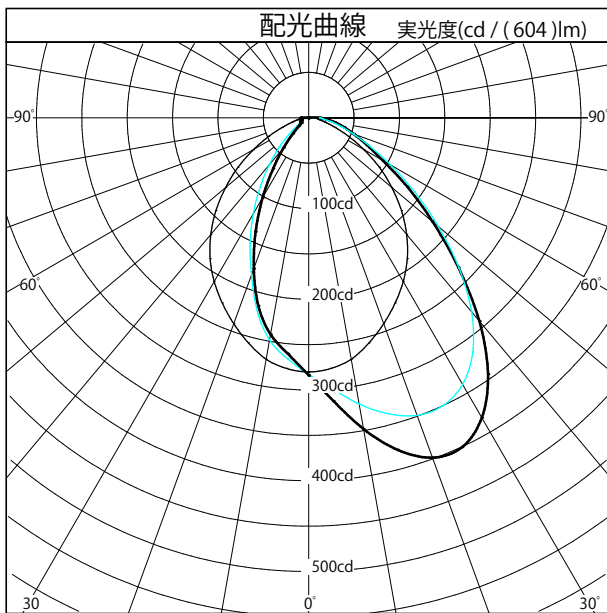

(m)	壁面照度分布							単灯		連灯	
	0.50	1.00	1.50	2.00	2.50	3.00	(m)	(m)	(m)	(m)	
0.50	56	38	15	5	2	1	1	92	89	92	
1.00	83	60	28	10	4	2	1	149	145	149	
1.50	60	48	28	13	6	3	1	134	130	134	
2.00	35	30	21	12	6	3	2	97	94	97	
2.50	20	18	14	10	6	3	2	68	66	68	
3.00	12	11	10	7	5	3	2	49	48	49	
3.50	8	7	6	5	4	3	2	36	35	36	

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0
単位: lx