



# 配光特性

図番 YL210270



カタログ番号	J599AN	
使用ランプ		
器具光束	1090.0	lm <sub>1.000</sub>
器具効率	100.0 %	
下方効率	100.0 %	
上方効率	0.0 %	
最大取付間隔		
A断面	0.45 H	
C断面		
B断面		

	角度	光度
	0°	4103
	10°	2753
	20°	939
	30°	126
	40°	23
	50°	16
	60°	14
	70°	13
	80°	12
	90°	11
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

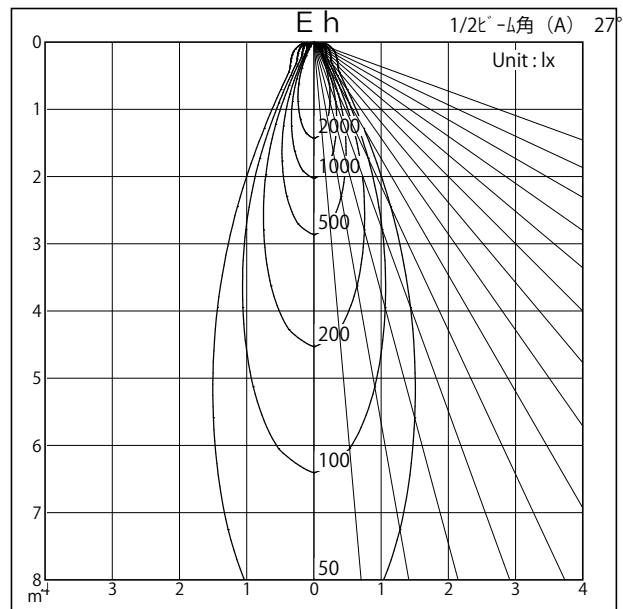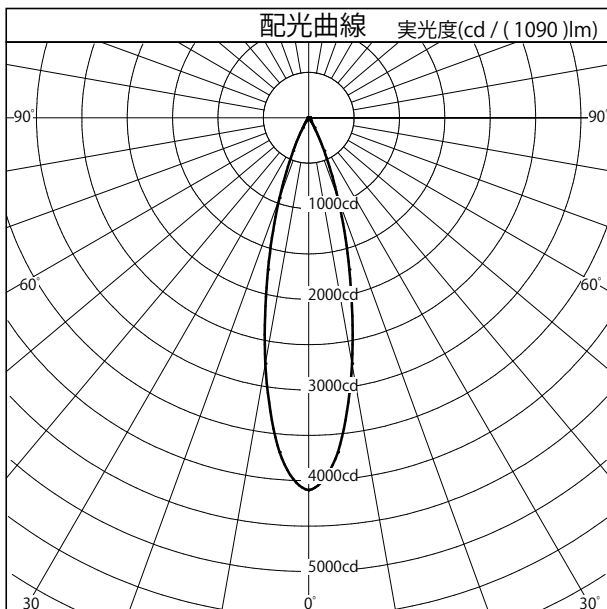

照明率表		平均照度=台数×照明率×保守率×1090(光束)/(間口×奥行)													
床面反射率 (%)		20													
天井面反射率 (%)		80			60			40			20				
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10		
室	0.50	0.82	0.78	0.75	0.81	0.78	0.75	0.81	0.77	0.75	0.80	0.77	0.75	0.74	
	0.70	0.89	0.85	0.82	0.88	0.84	0.82	0.87	0.84	0.81	0.86	0.83	0.81	0.80	
	1.00	0.96	0.92	0.89	0.94	0.91	0.88	0.93	0.89	0.87	0.91	0.88	0.86	0.85	
	1.25	0.99	0.95	0.92	0.97	0.94	0.91	0.95	0.92	0.90	0.93	0.91	0.89	0.87	
	1.50	1.02	0.98	0.95	0.99	0.96	0.94	0.97	0.95	0.92	0.95	0.93	0.91	0.89	
	指	2.00	1.05	1.02	0.99	1.03	1.00	0.97	1.00	0.97	0.95	0.97	0.95	0.94	0.91
		2.50	1.08	1.05	1.02	1.04	1.02	1.00	1.01	0.99	0.97	0.99	0.97	0.95	0.93
		3.00	1.09	1.07	1.04	1.06	1.03	1.01	1.03	1.01	0.99	0.99	0.98	0.97	0.94
		4.00	1.12	1.09	1.07	1.08	1.06	1.04	1.04	1.03	1.01	1.01	0.99	0.98	0.95
	数	5.00	1.13	1.11	1.09	1.09	1.07	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96
7.00		1.15	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.02	1.01	0.97	
10.00		1.16	1.15	1.14	1.12	1.11	1.10	1.07	1.06	1.06	1.03	1.02	1.02	0.98	