



# 配光特性

図番 YL210030



カタログ番号	J602CN
使用ランプ	
器具光束	1972.0 lm <small>1.000</small>
器具効率	100.0 %
下方効率	100.0 %
上方効率	0.0 %
最大取付間隔	
A断面	0.82 H
C断面	
B断面	

	角度	光度
	0°	3111
	10°	2978
	20°	2392
	30°	604
	40°	69
	50°	25
	60°	19
	70°	16
	80°	13
	90°	12
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

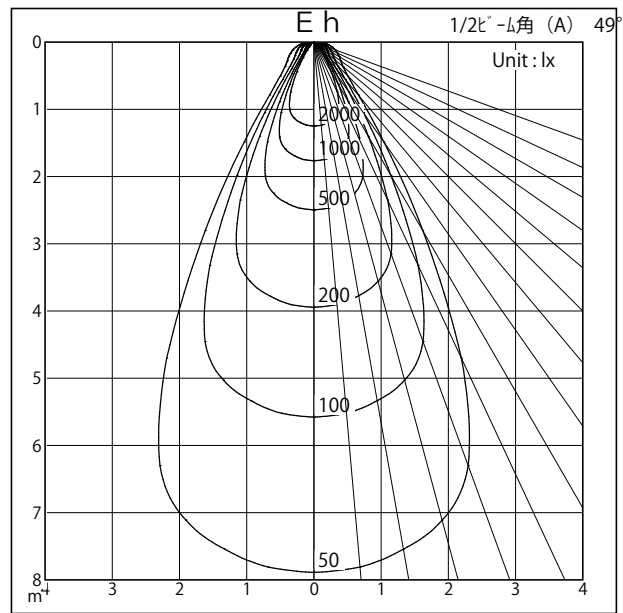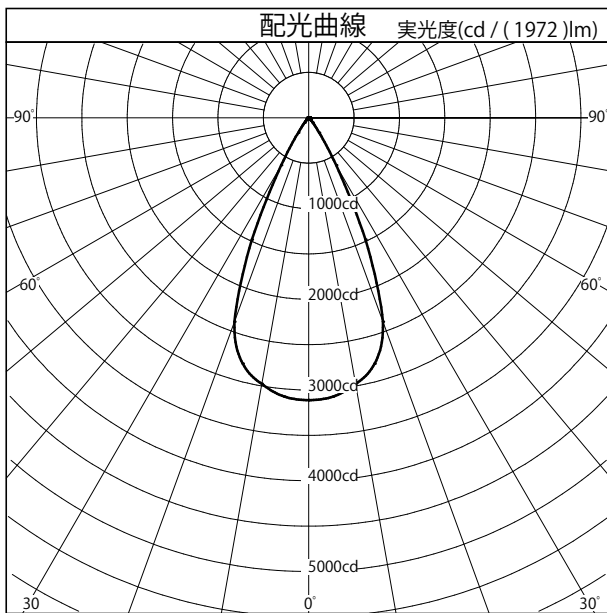

照明率表		平均照度=台数×照明率×保守率×1972(光束)/(間口×奥行)													
床面反射率 (%)		20													
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63	0.62	
	0.70	0.82	0.77	0.73	0.81	0.76	0.73	0.79	0.76	0.73	0.78	0.75	0.72	0.71	
	1.00	0.91	0.86	0.82	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80	0.79	
	1.25	0.95	0.91	0.87	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82	
	1.50	0.98	0.94	0.91	0.96	0.92	0.89	0.94	0.91	0.88	0.92	0.89	0.87	0.85	
	指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.97	0.94	0.92	0.94	0.92	0.90	0.88
		2.50	1.05	1.02	0.99	1.02	0.99	0.97	0.99	0.97	0.95	0.96	0.94	0.93	0.90
		3.00	1.07	1.04	1.02	1.04	1.01	0.99	1.00	0.98	0.97	0.97	0.96	0.94	0.92
		4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.01	0.99	0.99	0.98	0.97	0.94
	数	5.00	1.12	1.09	1.07	1.07	1.06	1.04	1.04	1.02	1.01	1.00	0.99	0.98	0.95
7.00		1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.01	1.00	0.99	0.96	
	10.00	1.15	1.14	1.13	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	1.01	0.97	