



配光特性

図番 YL230102



カタログ番号	L1057G
使用ランプ	LED電球 x8 49.6W
器具光束	1521.0 lm <small>1,000</small>
下方効率	99.0 %
上方効率	1.0 %
最大取付間隔	
A断面	1.24 H
C断面	
B断面	

	角度	光度
	0°	630
	10°	618
	20°	583
	30°	524
	40°	449
	50°	365
	60°	282
	70°	216
	80°	102
	90°	44
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

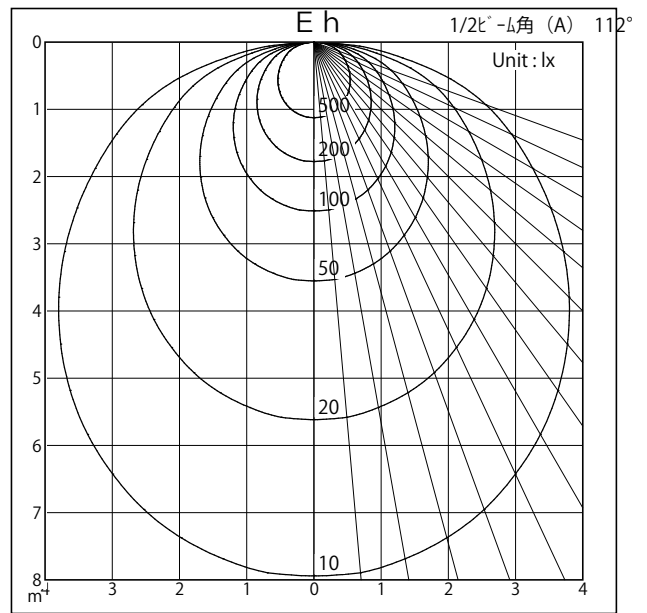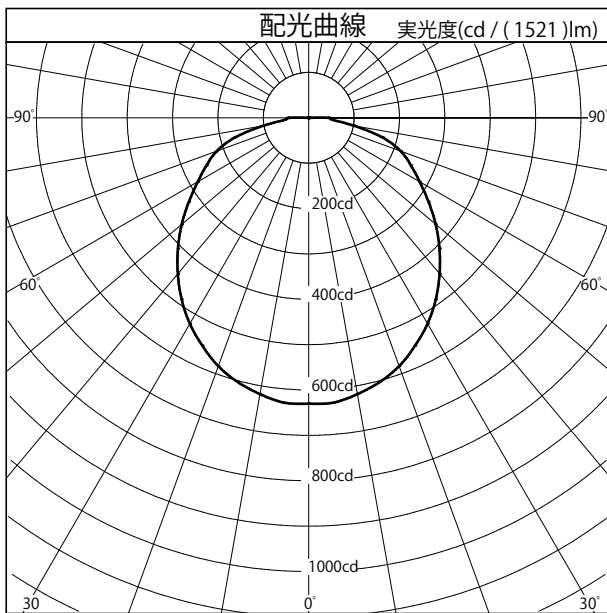

照明率表		平均照度=台数×照明率×保守率×1521(光束)/(間口×奥行)													
床面反射率 (%)		20													
天井面反射率 (%)		80			60			40			20			0	
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0	
室	0.50	0.46	0.36	0.29	0.45	0.35	0.29	0.43	0.35	0.29	0.42	0.34	0.29	0.26	
	0.70	0.61	0.50	0.42	0.59	0.49	0.41	0.57	0.48	0.41	0.55	0.47	0.41	0.38	
	1.00	0.77	0.66	0.57	0.74	0.64	0.57	0.71	0.63	0.56	0.69	0.61	0.55	0.52	
	1.25	0.87	0.76	0.67	0.83	0.74	0.66	0.80	0.72	0.65	0.77	0.70	0.64	0.61	
	1.50	0.94	0.83	0.75	0.90	0.81	0.74	0.87	0.79	0.72	0.83	0.77	0.71	0.68	
	指	2.00	1.04	0.95	0.87	1.00	0.92	0.85	0.96	0.89	0.83	0.92	0.87	0.82	0.78
		2.50	1.12	1.03	0.96	1.07	0.99	0.93	1.02	0.96	0.91	0.98	0.93	0.89	0.85
		3.00	1.16	1.09	1.02	1.11	1.05	0.99	1.07	1.01	0.96	1.02	0.98	0.94	0.90
		4.00	1.23	1.17	1.11	1.18	1.12	1.08	1.13	1.08	1.04	1.08	1.05	1.01	0.97
	数	5.00	1.28	1.22	1.17	1.22	1.17	1.13	1.17	1.13	1.09	1.12	1.09	1.06	1.02
7.00		1.33	1.28	1.24	1.27	1.23	1.20	1.21	1.18	1.16	1.16	1.14	1.12	1.07	
10.00		1.37	1.34	1.30	1.31	1.28	1.25	1.25	1.23	1.21	1.20	1.18	1.16	1.11	