



配光特性

図番 YL230094



カタログ番号	T4544B		
使用ランプ			
ランプ光束	678.0	lm	1.000
最大光度	1094.3	cd	
1 / 2 ビーム角			
A 断面	51.00°		
C 断面			
B 断面			

	角度	光度
	0°	1094
	10°	959
	20°	750
	30°	320
	40°	25
	50°	3
	60°	0
	70°	0
	80°	0
	90°	0
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
	170°	0
180°	0	

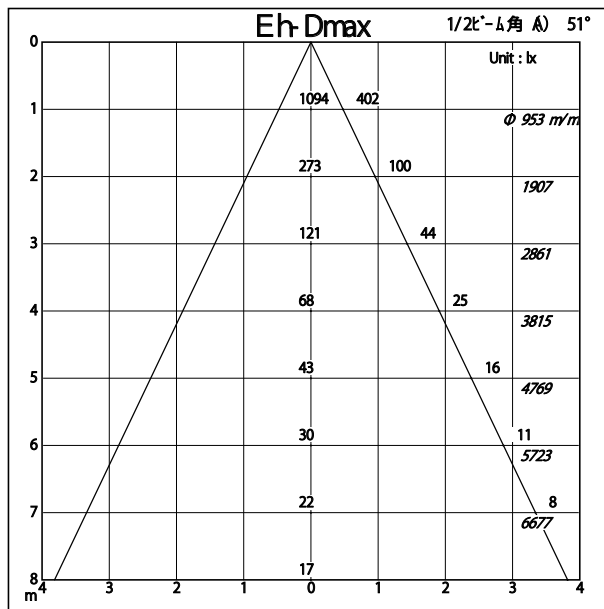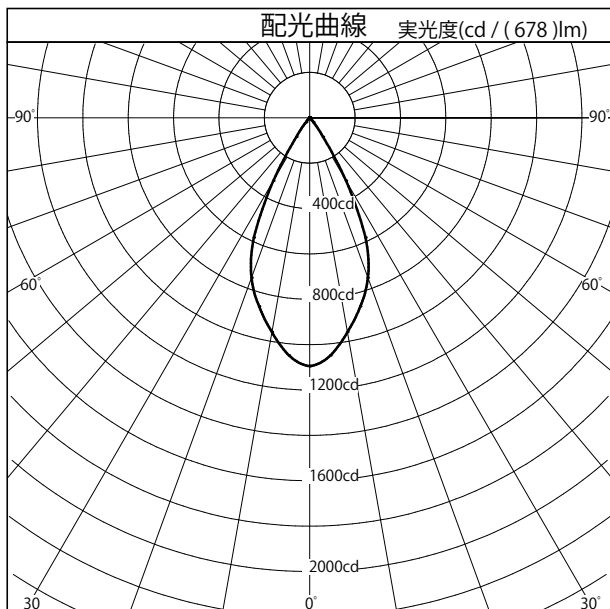

照明率表		平均照度=台数*照明率*保守率* 678 (光束)/(間口*奥行)												
床面反射率 %		20											0	
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.72	0.67	0.63	0.71	0.66	0.63	0.70	0.66	0.63	0.69	0.66	0.63	0.62
	0.70	0.82	0.77	0.74	0.81	0.77	0.74	0.80	0.76	0.73	0.79	0.76	0.73	0.72
	1.00	0.92	0.87	0.83	0.90	0.86	0.83	0.88	0.85	0.82	0.87	0.84	0.81	0.80
	1.25	0.96	0.92	0.88	0.94	0.90	0.87	0.92	0.89	0.86	0.90	0.88	0.85	0.84
	1.50	0.99	0.95	0.92	0.97	0.94	0.91	0.95	0.92	0.89	0.93	0.90	0.88	0.86
指	2.00	1.04	1.00	0.97	1.01	0.98	0.95	0.98	0.96	0.94	0.96	0.94	0.92	0.90
	2.50	1.06	1.03	1.00	1.03	1.00	0.98	1.00	0.98	0.96	0.97	0.96	0.94	0.92
	3.00	1.08	1.05	1.03	1.05	1.02	1.00	1.01	0.99	0.98	0.98	0.97	0.96	0.93
	4.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.02	1.00	1.00	0.99	0.98	0.95
	5.00	1.12	1.10	1.08	1.08	1.07	1.05	1.04	1.03	1.02	1.01	1.00	0.99	0.96
数	7.00	1.14	1.13	1.11	1.10	1.08	1.07	1.06	1.05	1.04	1.02	1.01	1.00	0.97
	10.00	1.16	1.14	1.13	1.11	1.10	1.09	1.06	1.06	1.05	1.03	1.02	1.01	0.98

XXXXXXXXXXXXXXXXXXXXXXXX