



# 配光特性

図番 YL230193

カタログ番号	T1159(B・S)
使用ランプ	LED 25.6W(31W) 4000K
器具光束	1725.0 lm <sub>1.000</sub>
最大光度	19701.2 cd
1 / 2 ビーム角	
A 断面	13.00°
C 断面	
B 断面	



	角度	光度
	0°	19701
	10°	4314
	20°	730
	30°	385
	40°	25
	50°	11
	60°	8
	70°	6
	80°	5
	90°	2
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

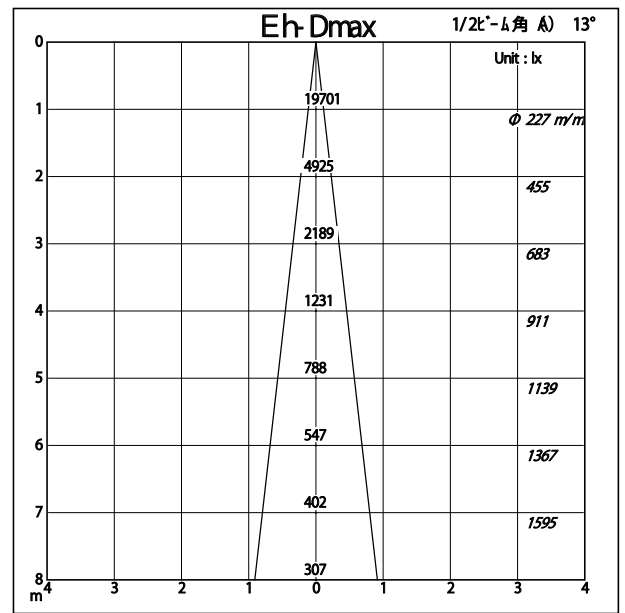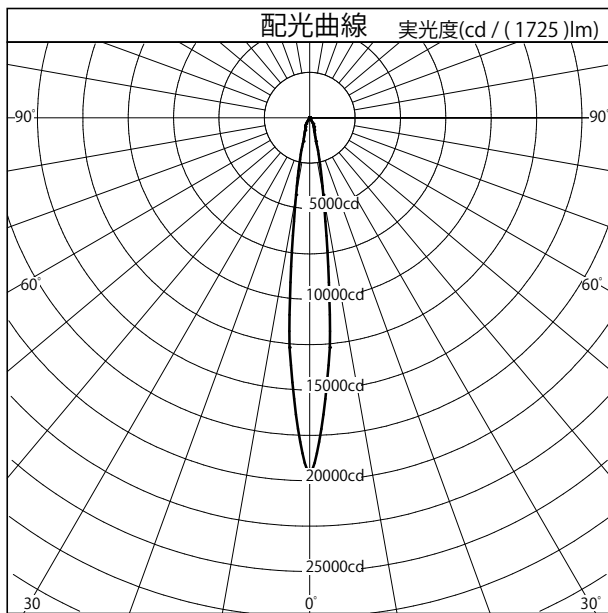

照明率表		平均照度=台数*照明率*保守率* 1725 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.91	0.88	0.86	0.91	0.88	0.86	0.90	0.87	0.86	0.90	0.87	0.85
	0.70	0.97	0.93	0.91	0.96	0.93	0.91	0.95	0.92	0.90	0.94	0.92	0.90
	1.00	1.02	0.98	0.96	1.00	0.97	0.95	0.99	0.96	0.94	0.97	0.95	0.94
	1.25	1.05	1.01	0.99	1.03	1.00	0.98	1.01	0.99	0.97	0.99	0.97	0.96
	1.50	1.07	1.04	1.01	1.04	1.02	1.00	1.02	1.00	0.98	1.00	0.98	0.97
指	2.00	1.10	1.07	1.04	1.07	1.04	1.02	1.04	1.02	1.01	1.02	1.00	0.99
	2.50	1.12	1.09	1.07	1.08	1.06	1.04	1.05	1.04	1.02	1.03	1.01	1.00
	3.00	1.13	1.11	1.08	1.09	1.07	1.06	1.06	1.05	1.03	1.03	1.02	1.01
	4.00	1.15	1.13	1.11	1.11	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.02
	5.00	1.16	1.14	1.13	1.12	1.10	1.09	1.08	1.07	1.06	1.04	1.04	1.03
数	7.00	1.17	1.16	1.15	1.13	1.12	1.11	1.09	1.08	1.07	1.05	1.04	1.04
	10.00	1.19	1.18	1.17	1.14	1.13	1.12	1.09	1.09	1.08	1.05	1.05	1.04