



# 配光特性

図番 YL230190

カタログ番号	T1161(B・S)
使用ランプ	LED 25.6W(31W) 3000K
器具光束	1976.0 lm <small>1.000</small>
最大光度	11051.8 cd
1 / 2 ビーム角	
A 断面	22.00°
C 断面	
B 断面	



	角度	光度
	0°	11052
	10°	6106
	20°	1205
	30°	207
	40°	43
	50°	13
	60°	8
	70°	6
	80°	5
	90°	4
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

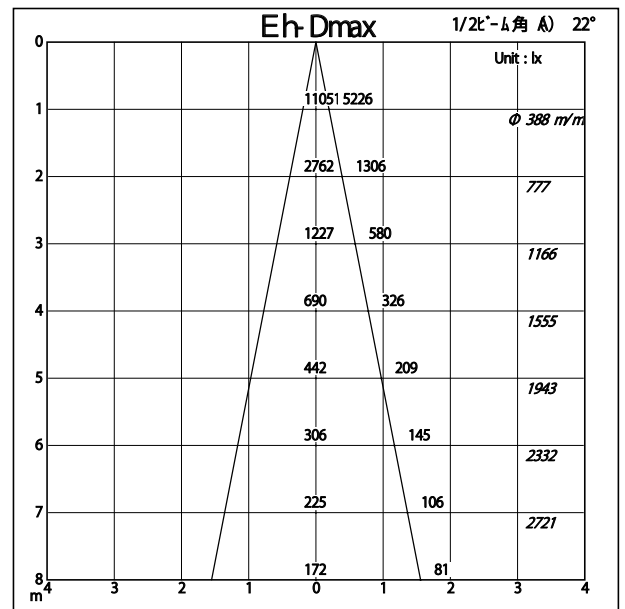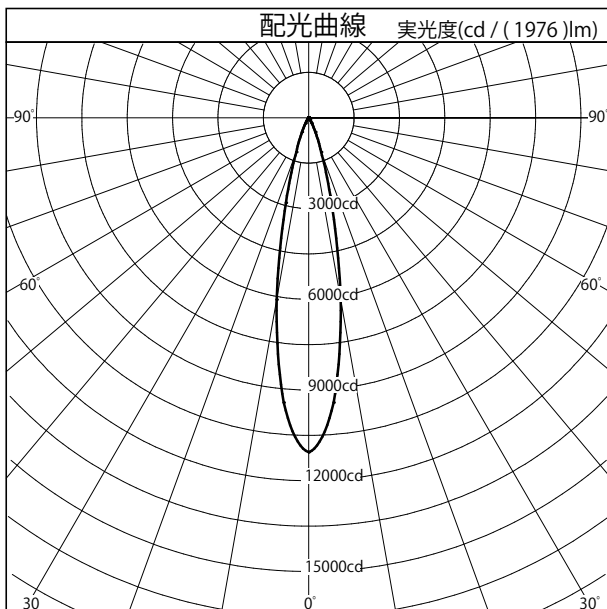

照明率表		平均照度=台数*照明率*保守率* 1976 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.89	0.86	0.83	0.88	0.85	0.83	0.88	0.85	0.83	0.87	0.85	0.83	0.82
	0.70	0.95	0.91	0.89	0.94	0.91	0.89	0.93	0.90	0.88	0.92	0.90	0.88	0.87
	1.00	1.00	0.97	0.94	0.99	0.96	0.93	0.97	0.95	0.93	0.96	0.94	0.92	0.91
	1.25	1.03	1.00	0.97	1.01	0.98	0.96	0.99	0.97	0.95	0.98	0.96	0.94	0.92
	1.50	1.05	1.02	1.00	1.03	1.00	0.98	1.01	0.99	0.97	0.99	0.97	0.96	0.94
指	2.00	1.08	1.05	1.03	1.05	1.03	1.01	1.03	1.01	0.99	1.00	0.99	0.98	0.95
	2.50	1.10	1.08	1.05	1.07	1.05	1.03	1.04	1.02	1.01	1.01	1.00	0.99	0.96
	3.00	1.12	1.09	1.07	1.08	1.06	1.05	1.05	1.03	1.02	1.02	1.01	1.00	0.97
	4.00	1.14	1.12	1.10	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	0.98
	5.00	1.15	1.13	1.11	1.11	1.09	1.08	1.07	1.06	1.05	1.03	1.02	1.02	0.99
数	7.00	1.16	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.03	1.03	0.99
	10.00	1.17	1.16	1.15	1.13	1.12	1.11	1.08	1.08	1.07	1.04	1.04	1.03	1.00