



配光特性

図番 YL230195



カタログ番号	T1164(B・S)
使用ランプ	LED 25.6W(31W) 4000K
器具光束	1900.0 lm <small>1.000</small>
最大光度	5257.5 cd
1 / 2 ビーム角	
A 断面	34.00°
C 断面	
B 断面	

	角度	光度
	0°	5258
	10°	4497
	20°	1882
	30°	339
	40°	55
	50°	14
	60°	8
	70°	6
	80°	5
	90°	4
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

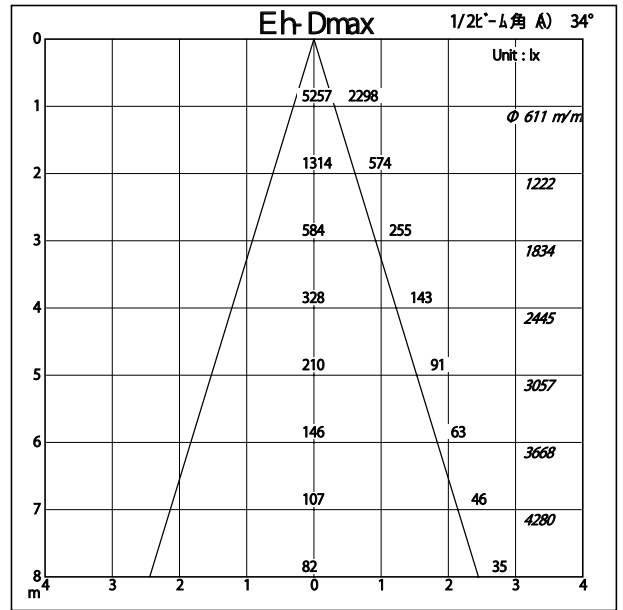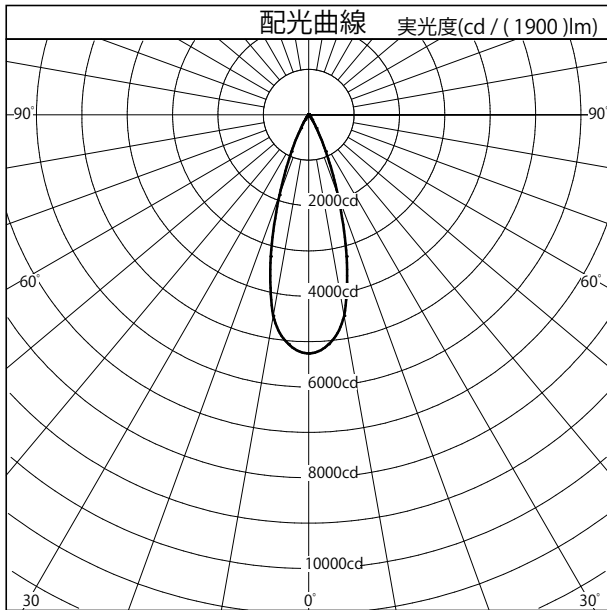

照明率表		平均照度=台数*照明率*保守率* 1900 (光束)/(間口*奥行)												
床面反射率 %		20												0
天井面反射率 %		80			60			40			20			0
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.81	0.77	0.74	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.74	0.73
	0.70	0.89	0.85	0.82	0.88	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.81	0.80
	1.00	0.97	0.93	0.89	0.95	0.91	0.89	0.93	0.90	0.88	0.92	0.89	0.87	0.86
	1.25	1.00	0.96	0.93	0.98	0.95	0.92	0.96	0.94	0.91	0.95	0.92	0.90	0.89
	1.50	1.03	0.99	0.96	1.01	0.97	0.95	0.98	0.96	0.94	0.96	0.94	0.92	0.91
指	2.00	1.07	1.03	1.00	1.04	1.01	0.99	1.01	0.99	0.97	0.98	0.97	0.95	0.93
	2.50	1.09	1.06	1.03	1.06	1.03	1.01	1.03	1.01	0.99	1.00	0.98	0.97	0.94
	3.00	1.10	1.08	1.05	1.07	1.05	1.03	1.04	1.02	1.00	1.01	0.99	0.98	0.95
	4.00	1.13	1.10	1.08	1.09	1.07	1.05	1.05	1.04	1.02	1.02	1.01	1.00	0.97
	5.00	1.14	1.12	1.10	1.10	1.08	1.07	1.06	1.05	1.04	1.02	1.02	1.01	0.98
数	7.00	1.16	1.14	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.03	1.02	0.98
	10.00	1.17	1.16	1.15	1.12	1.11	1.10	1.08	1.07	1.07	1.04	1.03	1.03	0.99