



# 配光特性

図番 YL230026



カタログ番号	T1166(B・S)
使用ランプ	
器具光束	549.0 lm <small>1,000</small>
最大光度	10561.7 cd
1 / 2 ビーム角	
A 断面	10.00 °
C 断面	
B 断面	

	角度	光度
	0°	10562
	10°	1040
	20°	122
	30°	69
	40°	17
	50°	22
	60°	9
	70°	7
	80°	6
	90°	6
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

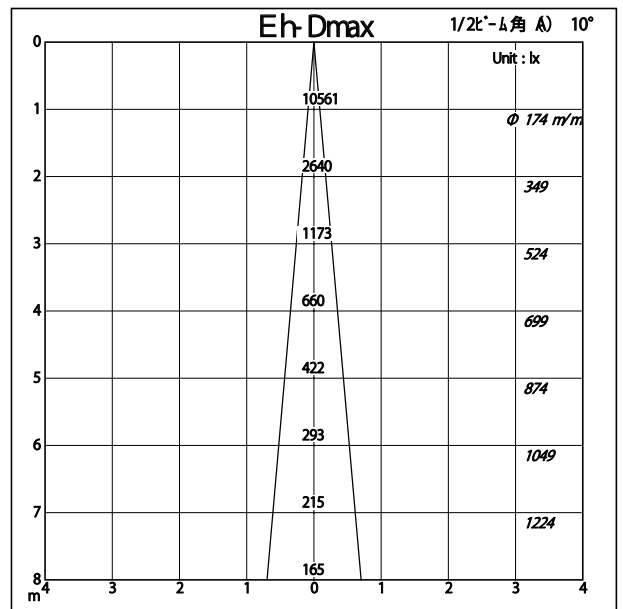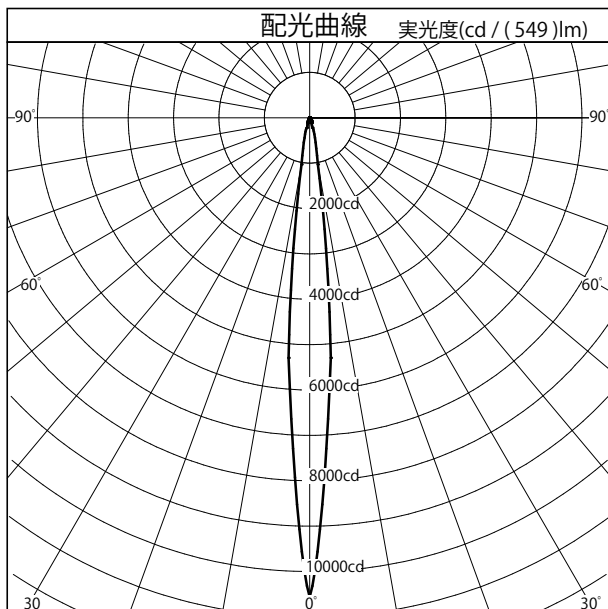

照明率表		平均照度=台数*照明率*保守率* 549 (光束)/(間口*奥行)												
床面反射率 %		20												
天井面反射率 %		80			60			40			20			
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10	
室	0.50	0.93	0.90	0.88	0.93	0.90	0.87	0.92	0.89	0.87	0.91	0.89	0.87	0.86
	0.70	0.98	0.94	0.92	0.97	0.93	0.91	0.96	0.93	0.91	0.95	0.92	0.90	0.89
	1.00	1.02	0.99	0.96	1.01	0.98	0.95	0.99	0.96	0.94	0.98	0.95	0.94	0.92
	1.25	1.05	1.02	0.99	1.03	1.00	0.98	1.01	0.99	0.96	0.99	0.97	0.95	0.94
	1.50	1.07	1.04	1.01	1.05	1.02	1.00	1.03	1.00	0.98	1.00	0.98	0.97	0.95
指	2.00	1.10	1.07	1.04	1.07	1.05	1.02	1.05	1.02	1.01	1.02	1.00	0.99	0.96
	2.50	1.12	1.09	1.07	1.09	1.07	1.05	1.06	1.04	1.02	1.03	1.01	1.00	0.98
	3.00	1.14	1.11	1.09	1.10	1.08	1.06	1.07	1.05	1.03	1.04	1.02	1.01	0.98
	4.00	1.16	1.14	1.12	1.12	1.10	1.08	1.08	1.07	1.05	1.05	1.03	1.02	0.99
	5.00	1.17	1.15	1.13	1.13	1.11	1.10	1.09	1.08	1.06	1.05	1.04	1.03	1.00
数	7.00	1.19	1.17	1.16	1.14	1.13	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.01
	10.00	1.20	1.19	1.18	1.15	1.14	1.13	1.11	1.10	1.09	1.06	1.06	1.05	1.02