



# 配光特性

図番 YL230062



カタログ番号	J-640
使用ランプ	
器具光束	445.0 lm <sub>1,000</sub>
器具効率	100.0 %
下方効率	0.0 %
上方効率	100.0 %
最大取付間隔	
A断面	
C断面	
B断面	

角度	光度
0°	0
10°	0
20°	0
30°	0
40°	0
50°	0
60°	0
70°	0
80°	0
90°	3
100°	9
110°	40
120°	75
130°	119
140°	193
150°	324
160°	457
170°	431
180°	310

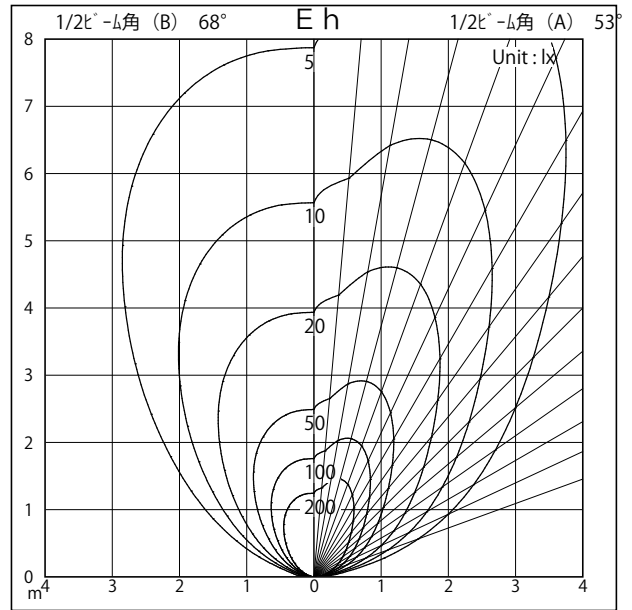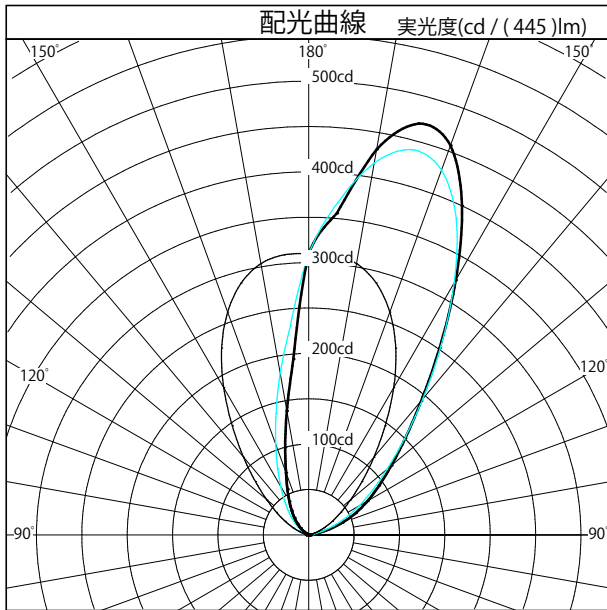

高さ (m)	壁面照度分布							単灯			連灯		
	3.50	3.00	2.50	2.00	1.50	1.00	0.50	3.50	3.00	2.50	2.00	1.50	1.00
3.50	10	9	8	5	3	2	1	36	35	36			
3.00	15	13	10	6	4	2	1	47	46	47			
2.50	22	19	14	7	4	2	1	61	60	61			
2.00	34	28	17	8	4	2	1	78	77	78			
1.50	46	36	19	8	3	2	1	92	90	92			
1.00	53	38	17	6	2	1	0	92	90	92			
0.50	45	26	8	2	1	0	0	63	56	63			

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0 (m)  
単位: lx (m)