



# 配光特性

図番 YL230108



カタログ番号	J-641
使用ランプ	
器具光束	471.0 lm <sub>1,000</sub>
器具効率	102.3 %
下方効率	0.2 %
上方効率	102.1 %
最大取付間隔	
A 断面	
C 断面	
B 断面	

角度	光度
0°	0
10°	0
20°	0
30°	0
40°	0
50°	0
60°	0
70°	0
80°	0
90°	3
100°	9
110°	42
120°	80
130°	126
140°	204
150°	343
160°	484
170°	457
180°	328

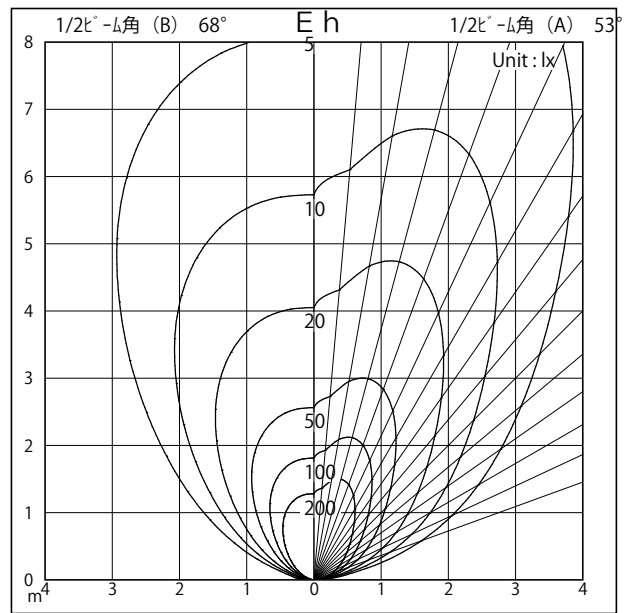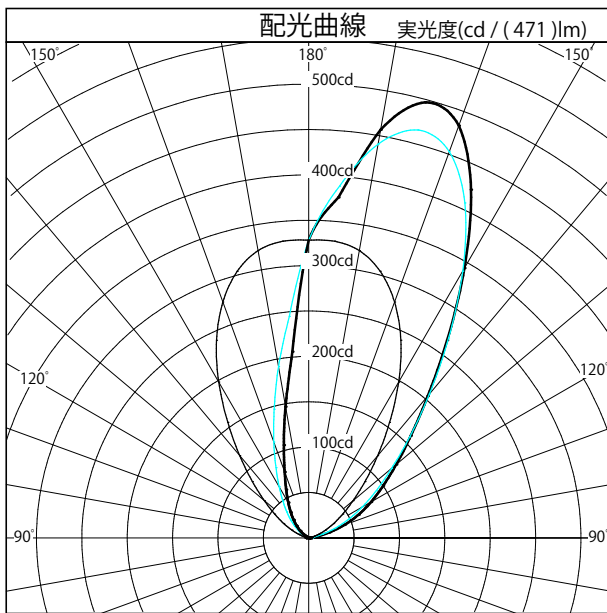

高さ (m)	壁面照度分布 (単灯)						連灯			
	0.50	1.00	1.50	2.00	2.50	3.00	0.50	1.00	1.50	
3.50	10	10	8	6	4	2	1	38	37	38
3.00	15	14	11	7	4	2	1	50	49	50
2.50	24	21	15	8	4	2	1	65	64	65
2.00	36	29	18	9	4	2	1	83	81	83
1.50	49	38	20	8	3	2	1	98	96	98
1.00	56	40	18	6	2	1	0	98	95	98
0.50	48	27	9	2	1	0	0	67	60	67

壁面からの距離: 1.0m 器具間隔: 1.0m 保守率: 1.0(m)  
単位: lx (m)