


配光特性

図番 MR190163





カタログ番号	YT01VW9		
オプション番号	YZ012W9 3500K		
使用ランプ	LED15W		
ランプ光束	408.0	lm	1.000
最大光度	3238.5 cd		
1/2ビーム角			
A断面	18.00 °		
C断面			
B断面			

角度	光度
0°	3239
10°	1364
20°	194
30°	22
40°	7
50°	2
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

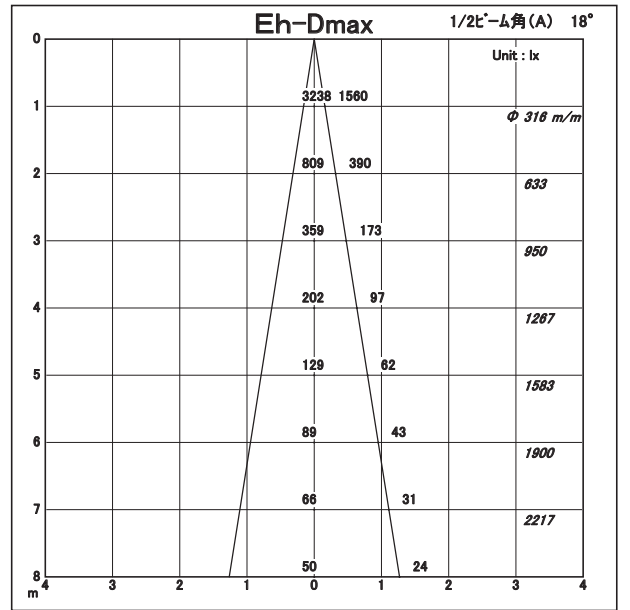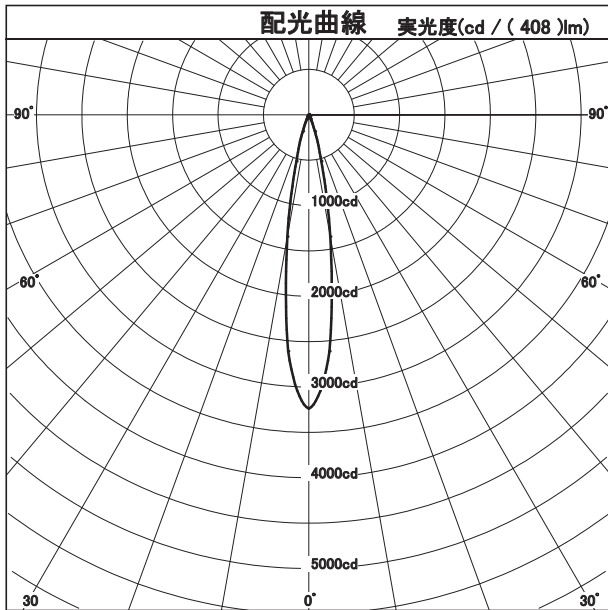

照明率表		平均照度=台数*照明率*保守率*408(光束)/(間口*奥行)												
床面反射率(%)		20												0
天井面反射率(%)		80			60			40			20			0
壁面反射率(%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.94	0.91	0.90	0.94	0.91	0.89	0.93	0.91	0.89	0.93	0.91	0.89	0.88
	0.70	0.99	0.96	0.94	0.98	0.95	0.93	0.97	0.95	0.93	0.96	0.94	0.93	0.92
	1.00	1.03	1.00	0.98	1.02	0.99	0.97	1.00	0.98	0.96	0.99	0.97	0.96	0.94
	1.25	1.06	1.03	1.00	1.04	1.01	0.99	1.02	1.00	0.98	1.00	0.99	0.97	0.96
	1.50	1.07	1.05	1.02	1.05	1.03	1.01	1.03	1.01	1.00	1.01	1.00	0.98	0.97
指	2.00	1.10	1.07	1.05	1.07	1.05	1.03	1.05	1.03	1.01	1.02	1.01	1.00	0.98
	2.50	1.12	1.09	1.07	1.08	1.07	1.05	1.05	1.04	1.03	1.03	1.02	1.01	0.98
	3.00	1.13	1.11	1.09	1.09	1.08	1.06	1.06	1.05	1.04	1.03	1.02	1.01	0.99
	4.00	1.14	1.13	1.11	1.11	1.09	1.08	1.07	1.06	1.05	1.04	1.03	1.02	0.99
数	5.00	1.15	1.14	1.13	1.11	1.10	1.09	1.07	1.07	1.06	1.04	1.03	1.03	1.00
	7.00	1.17	1.16	1.14	1.12	1.11	1.10	1.08	1.07	1.07	1.04	1.04	1.03	1.00
	10.00	1.18	1.17	1.16	1.13	1.12	1.12	1.09	1.08	1.08	1.05	1.04	1.04	1.00