


配光特性

図番 MR190164





カタログ番号	YT01VB9		
オプション番号	YZ013B9 3500K		
使用ランプ	LED15W		
ランプ光束	505.0	lm	1.000
最大光度	2109.5 cd		
1/2ビーム角			
A断面	29.00 °		
C断面			
B断面			

角度	光度
0°	2110
10°	1673
20°	378
30°	20
40°	4
50°	0
60°	0
70°	0
80°	0
90°	0
100°	0
110°	0
120°	0
130°	0
140°	0
150°	0
160°	0
170°	0
180°	0



断面

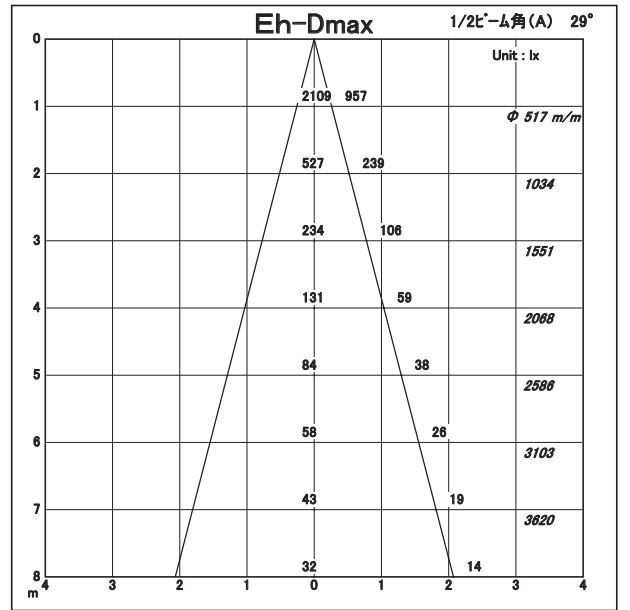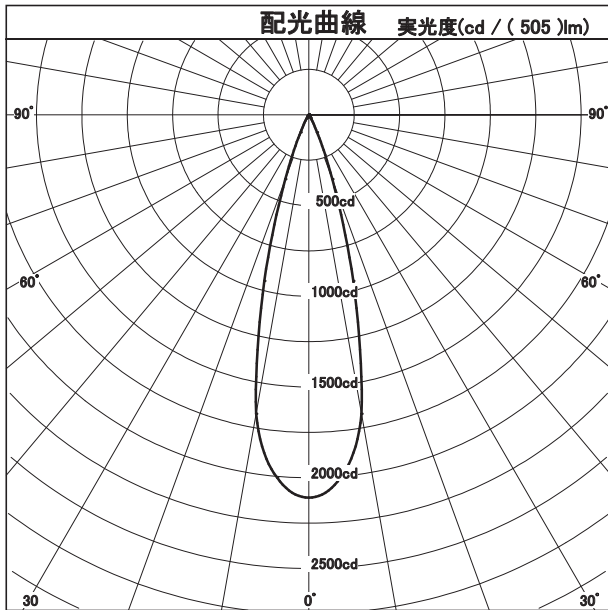

照明率表		平均照度=台数 * 照明率 * 保守率 * 505 (光束) / (間口 * 奥行)												
床面反射率 (%)		20												
天井面反射率 (%)		80			60			40			20			0
壁面反射率 (%)		50	30	10	50	30	10	50	30	10	50	30	10	0
室	0.50	0.91	0.88	0.85	0.90	0.87	0.85	0.90	0.87	0.85	0.89	0.87	0.85	0.84
	0.70	0.97	0.93	0.91	0.95	0.93	0.90	0.95	0.92	0.90	0.94	0.91	0.90	0.89
	1.00	1.02	0.98	0.96	1.00	0.97	0.95	0.99	0.96	0.94	0.97	0.95	0.94	0.92
	1.25	1.04	1.01	0.99	1.02	1.00	0.98	1.01	0.98	0.97	0.99	0.97	0.96	0.94
	1.50	1.06	1.03	1.01	1.04	1.02	1.00	1.02	1.00	0.98	1.00	0.98	0.97	0.95
指	2.00	1.09	1.06	1.04	1.06	1.04	1.02	1.04	1.02	1.00	1.01	1.00	0.99	0.97
	2.50	1.11	1.08	1.06	1.08	1.06	1.04	1.05	1.03	1.02	1.02	1.01	1.00	0.97
	3.00	1.12	1.10	1.08	1.09	1.07	1.05	1.06	1.04	1.03	1.03	1.02	1.01	0.98
	4.00	1.14	1.12	1.10	1.10	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.02	0.99
	5.00	1.15	1.14	1.12	1.11	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	0.99
数	7.00	1.16	1.15	1.14	1.12	1.11	1.10	1.08	1.07	1.06	1.04	1.04	1.03	1.00
	10.00	1.18	1.17	1.16	1.13	1.12	1.11	1.08	1.08	1.07	1.04	1.04	1.04	1.00