



配光特性

図番 YL210140



カタログ番号	T533V(B・W)		
使用ランプ	2700K		
器具光束	1153.0	lm	1.000
最大光度	2613	cd	
1 / 2 ビーム角			
A 断面	36.00°		
C 断面			
B 断面			

	角度	光度
	0°	2613
	10°	2145
	20°	1061
	30°	316
	40°	81
	50°	27
	60°	18
	70°	15
	80°	11
	90°	10
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

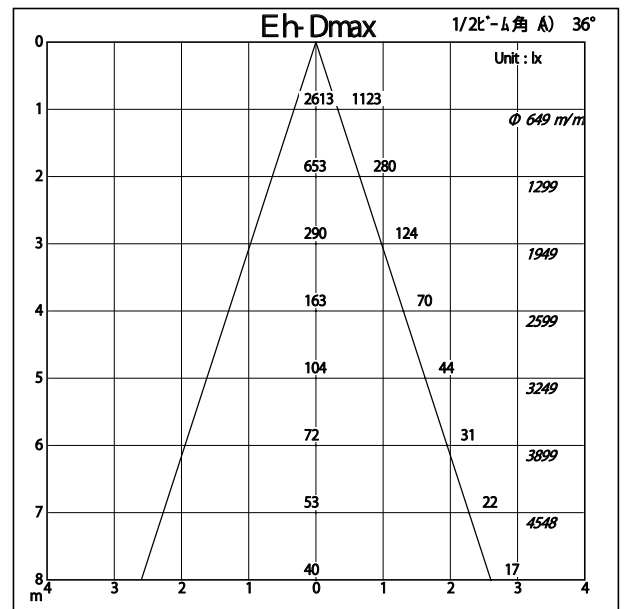
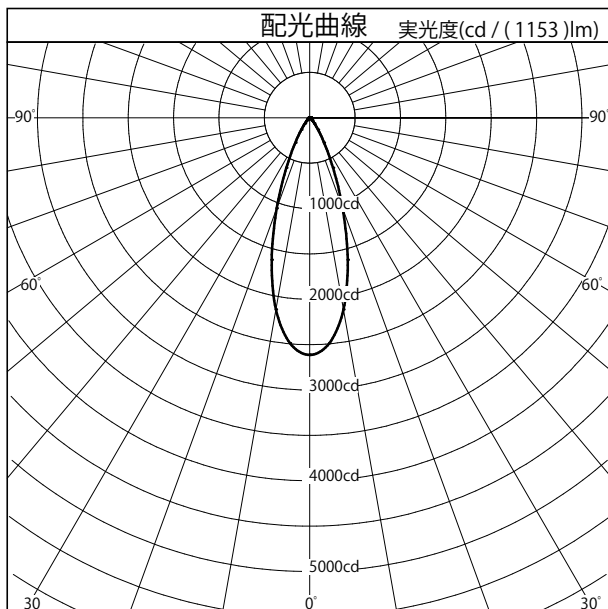


照明率表		平均照度=台数*照明率*保守率* 1153 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.74	0.69	0.66	0.73	0.69	0.66	0.72	0.68	0.65	0.72	0.68	0.65
	0.70	0.83	0.78	0.75	0.82	0.77	0.74	0.81	0.77	0.74	0.80	0.76	0.74
	1.00	0.92	0.87	0.83	0.90	0.86	0.82	0.88	0.84	0.82	0.87	0.83	0.81
	1.25	0.96	0.91	0.88	0.94	0.90	0.87	0.92	0.88	0.86	0.90	0.87	0.85
	1.50	0.99	0.95	0.91	0.97	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.87
指	2.00	1.03	0.99	0.96	1.00	0.97	0.94	0.98	0.95	0.93	0.95	0.93	0.91
	2.50	1.06	1.03	1.00	1.03	1.00	0.97	1.00	0.97	0.95	0.97	0.95	0.93
	3.00	1.08	1.05	1.02	1.04	1.02	1.00	1.01	0.99	0.97	0.98	0.96	0.95
	4.00	1.11	1.08	1.06	1.07	1.05	1.03	1.03	1.01	1.00	1.00	0.98	0.97
	5.00	1.12	1.10	1.08	1.08	1.06	1.05	1.04	1.03	1.01	1.01	1.00	0.98
数	7.00	1.14	1.13	1.11	1.10	1.08	1.07	1.06	1.05	1.03	1.02	1.01	1.00
	10.00	1.16	1.15	1.13	1.11	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01



カタログ番号	T533V(B・W)		
使用ランプ	5000K		
器具光束	1363.0	lm	1.000
最大光度	3088.1	cd	
1 / 2 ビーム角			
A 断面	36.00°		
C 断面			
B 断面			

	角度	光度
	0°	3088
	10°	2535
	20°	1254
	30°	373
	40°	96
	50°	32
	60°	22
	70°	18
	80°	13
	90°	12
	100°	0
	110°	0
	120°	0
	130°	0
	140°	0
	150°	0
	160°	0
170°	0	
180°	0	

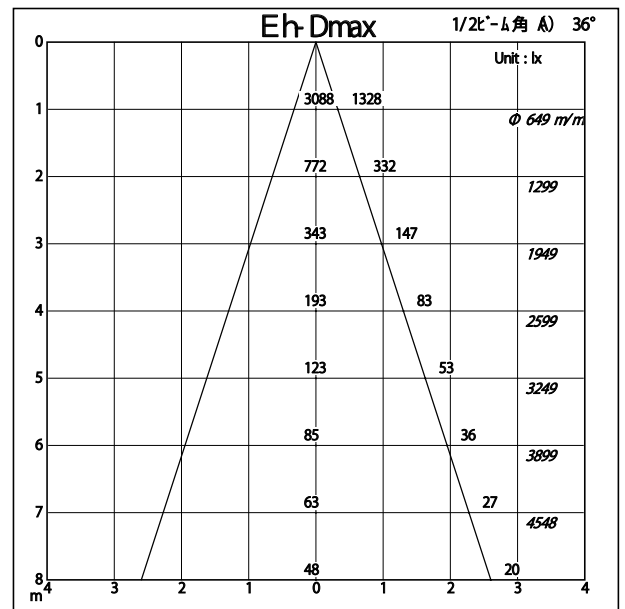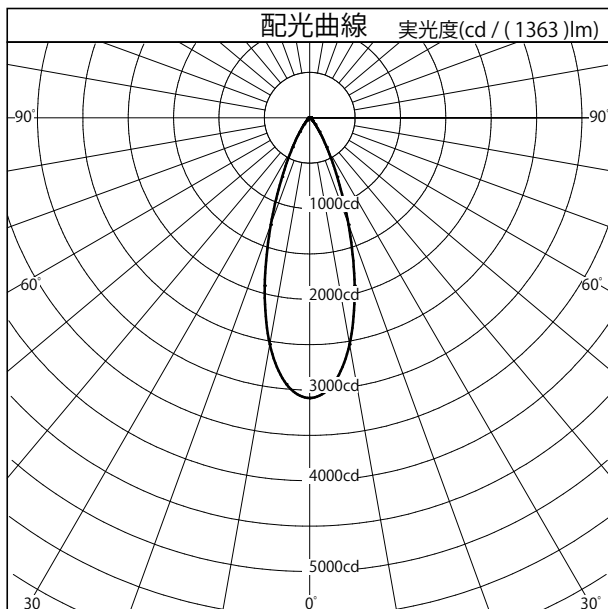

照明率表		平均照度=台数*照明率*保守率* 1363 (光束)/(間口*奥行)											
床面反射率 %		20											
天井面反射率 %		80			60			40			20		
壁面反射率 %		50	30	10	50	30	10	50	30	10	50	30	10
室	0.50	0.73	0.68	0.65	0.72	0.68	0.65	0.72	0.68	0.65	0.71	0.67	0.65
	0.70	0.82	0.77	0.74	0.81	0.77	0.74	0.80	0.76	0.73	0.79	0.75	0.73
	1.00	0.91	0.86	0.82	0.89	0.85	0.82	0.87	0.84	0.81	0.86	0.83	0.80
	1.25	0.95	0.90	0.87	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84
	1.50	0.98	0.94	0.90	0.96	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87
指	2.00	1.02	0.98	0.95	0.99	0.96	0.93	0.97	0.94	0.92	0.94	0.92	0.90
	2.50	1.05	1.02	0.99	1.02	0.99	0.96	0.99	0.96	0.94	0.96	0.94	0.92
	3.00	1.07	1.04	1.01	1.03	1.01	0.99	1.00	0.98	0.96	0.97	0.95	0.94
	4.00	1.10	1.07	1.05	1.06	1.04	1.02	1.02	1.00	0.99	0.99	0.97	0.96
	5.00	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.00	1.00	0.99	0.97
数	7.00	1.13	1.12	1.10	1.09	1.07	1.06	1.05	1.03	1.02	1.01	1.00	0.99
	10.00	1.15	1.14	1.12	1.10	1.09	1.08	1.06	1.05	1.04	1.02	1.01	0.97