

**Luminaire**

Code M254225  
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

**Measur.**


Code FTS1602232  
 Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	846.51 lm	Luminaire Power	13.00 W	Efficacy	65.12 lm/W	Efficiency	100.00%
Lamps Flux	846.51 lm	Maximum value	3301.84 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001963 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000475 m2	
Coordinate system Date Measurement Distance		CG 30-06-2015 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 846.51 lm	

LED Flux=1390lm LED Power=13W Eff=60,9% EfcLed=107lm/W EfcLum=65lm/W Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


80mm x 80mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

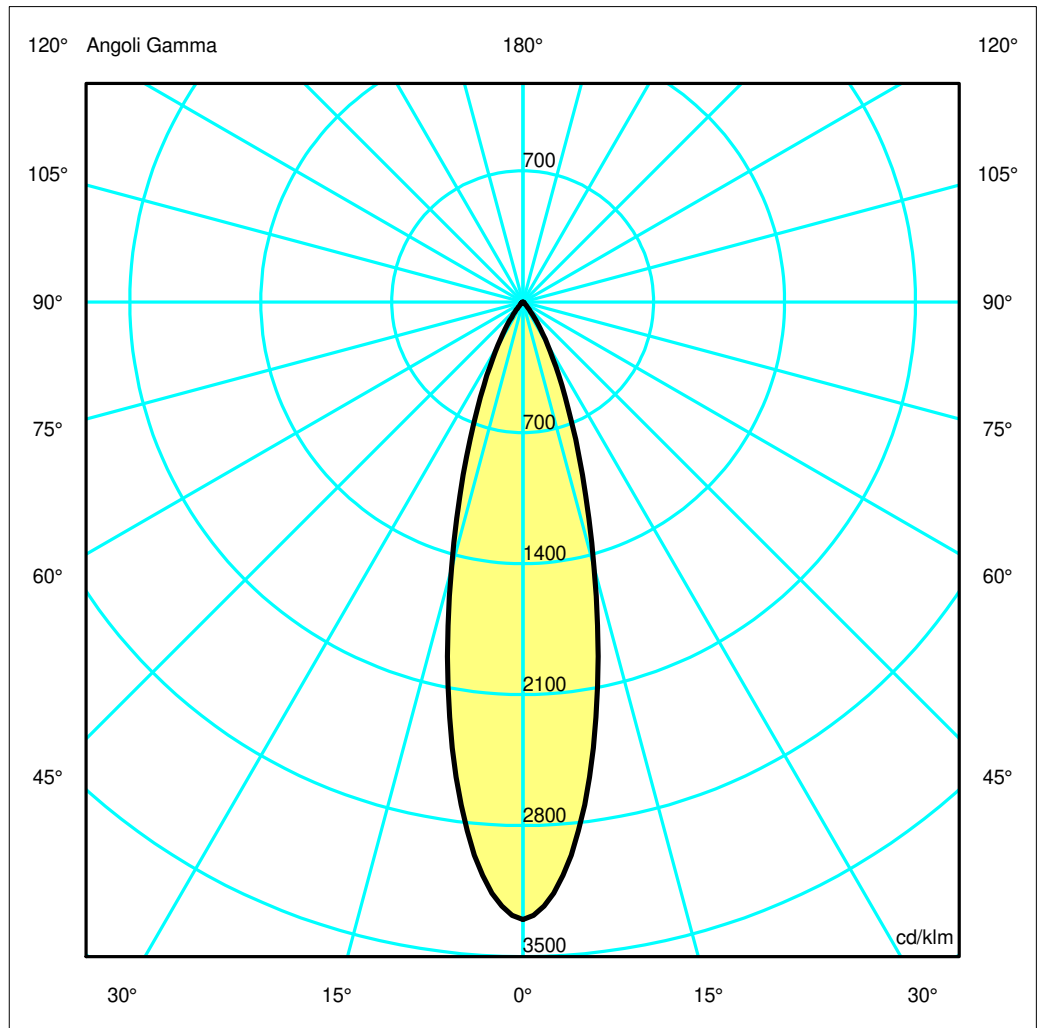

## Luminaire

Code M254225  
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

## Measurement


Code FTS1602232  
Name EVERYTHING 80 QUADRATO TRIM ORIENTABILE LED 3000K FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	846.51 lm	Luminaire Power	13.00 W	Efficacy	65.12 lm/W	Efficiency	100.00%
Lamps Flux	846.51 lm	Maximum value	3301.84 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	80 mm 50 mm	Width Height	80 mm 0 mm	Height	115 mm
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		30-06-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		846.51 lm	
LED Flux=1390lm LED Power=13W Eff=60,9% EfcLed=107lm/W EfcLum=65lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.98	1.23	OC	0.25	0.49	0.74	0.98	1.23
OB	0.25	0.49	0.74	0.98	1.23	OD	0.25	0.49	0.74	0.98	1.23

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12
OB	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12
OC	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12
OD	2795.04	2512.59	1245.80	418.05	104.27	14.64	2.66	0.61	0.35	0.12

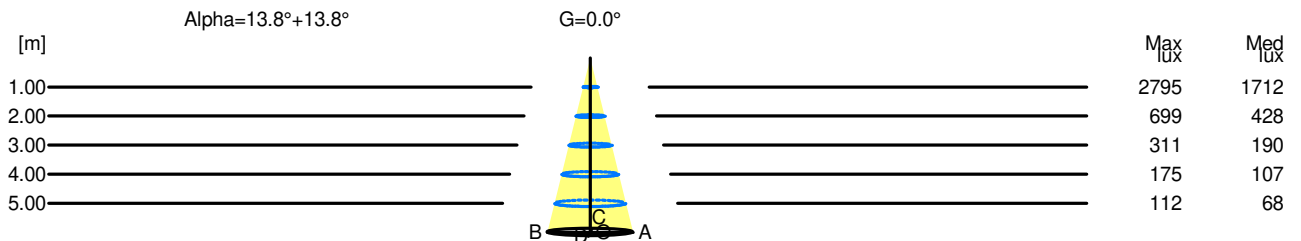

H[m]	D[m]	Max lux	Med lux	Alpha=13.8°+13.8°	G=0.0
1.00	0.49	2795	1712		
2.00	0.98	699	428		
3.00	1.47	311	190		
4.00	1.97	175	107		
5.00	2.46	112	68		