

**Luminaire**

Code AF05201+AF95104  
 Name SHARP RECESSED TRIM 2X 6W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

**Measur.**

Code FTS1603139  
 Name SHARP RECESSED TRIM 2X 6W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

Luminaire Flux	356.84 lm	Luminaire Power	6.00 W	Efficacy	59.47 lm/W	Efficiency	100.00%
Lamps Flux	356.84 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.002664 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000644 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		356.84 lm	


LED Flux=498,1lm LED Power=6W Eff=72% EfcLed=83lm/W EfcLum=59lm/W CCT=2700K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 99 100 100 100 100  
 F UTE --

D DIN 5040  
 B NBN

A60  
 BZ 1


74mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

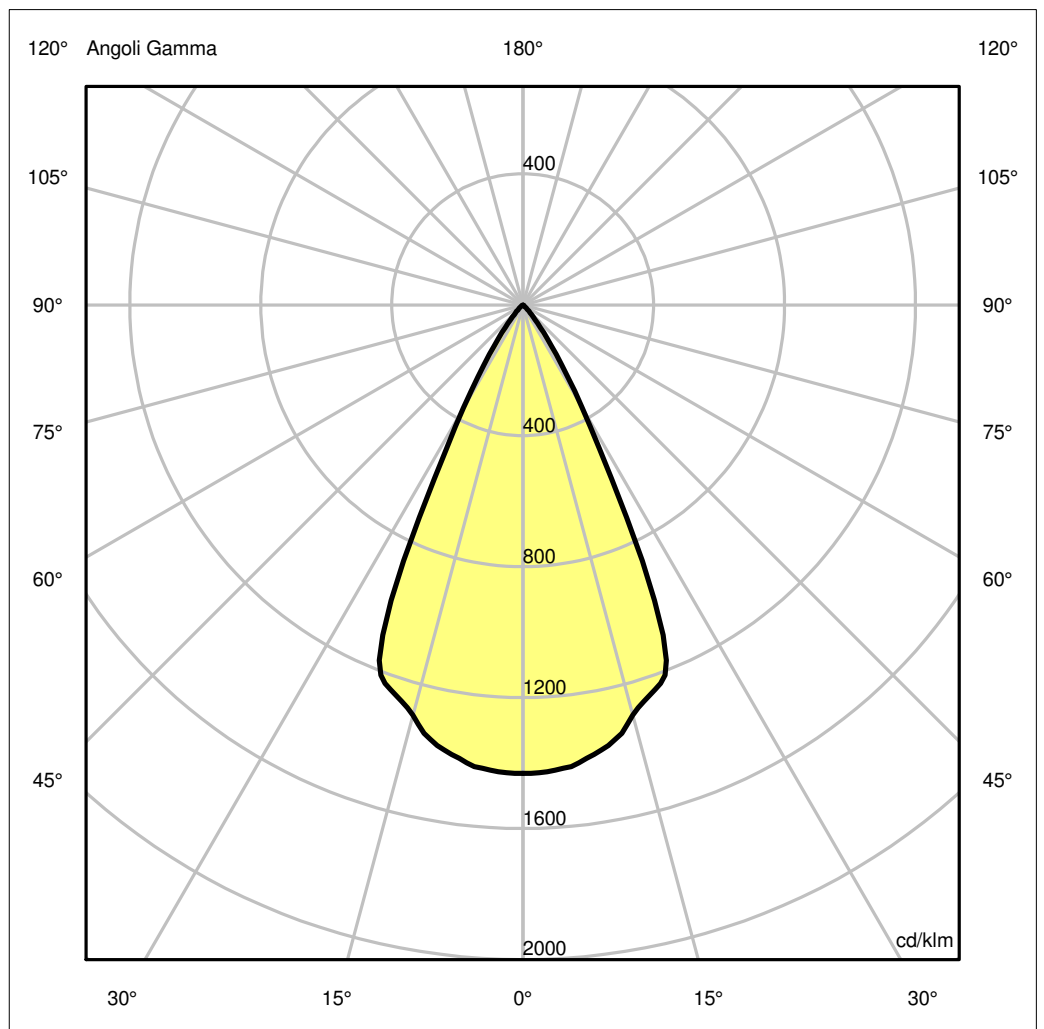

## Luminaire

Code AF05201+AF95104  
 Name SHARP RECESSED TRIM 2X 6W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK

## Measurerm.

Code FTS1603139  
 Name SHARP RECESSED TRIM 2X 6W 927 VERY WIDE FLOOD WHITE EXT.DRV + SCREEN 2X BLACK


Luminaire Flux	356.84 lm	Luminaire Power	6.00 W	Efficacy	59.47 lm/W	Efficiency	100.00%
Lamps Flux	356.84 lm	Maximum value	1430.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	74 mm	Width	40 mm	Height	55 mm
Rectangular Luminous Area		Length	72 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.002664 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000644 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-07-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		356.84 lm	
LED Flux=498,1lm LED Power=6W Eff=72% EfcLed=83lm/W EfcLum=59lm/W CCT=2700K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.49	0.98	1.47	1.96	2.44	OC	0.49	0.98	1.47	1.96	2.44
OB	0.49	0.98	1.47	1.96	2.44	OD	0.49	0.98	1.47	1.96	2.44

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	510.63	506.96	462.88	307.89	54.52	7.95	0.62	0.00	0.00	0.00
OB	510.63	506.96	462.88	307.89	54.52	7.95	0.62	0.00	0.00	0.00
OC	510.63	506.96	462.88	307.89	54.52	7.95	0.62	0.00	0.00	0.00
OD	510.63	506.96	462.88	307.89	54.52	7.95	0.62	0.00	0.00	0.00

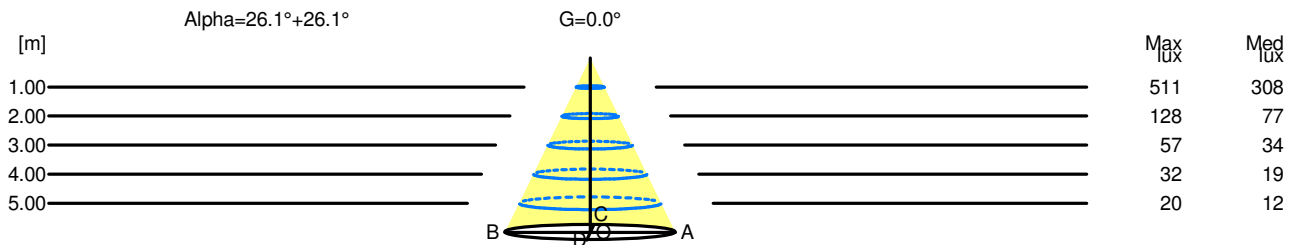

H[m]	D[m]	Max lux	Med lux	Alpha=26.1°+26.1°	G=0.0
1.00	0.98	511	308		
2.00	1.96	128	77		
3.00	2.93	57	34		
4.00	3.91	32	19		
5.00	4.89	20	12		